

No.	REVISIONS	BY	DATE
1	REMOVE STANDING STAYS & ADD REFLECTIVE TUBING	JF	10/96

NOTES:


Gates and Bracing as per CB6-2.12.M2

- ① Stay Lengths - Hanging 0.860m
- ② 22mm for all applications.
- ③ 5mm for barbed and barbless double strand wire.
- ④ 266mm for barbed and barbless double strand wire.
- ⑤ 13mm for barbed and barbless double strand wire.

STAY PLACEMENT EXAMPLES

Barbed and barbless double strand wire.

(p) - Line Posts
(h) - Hanging Stays

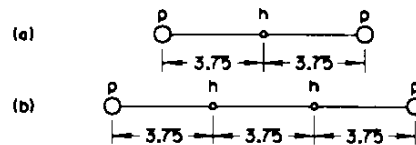

MATERIALS: - per km (approx.)

Stay Placement Examples	(p)	(h)
(a)	134	134
(b)	90	178

Approved: *Allen Kuen*
Executive Director,
Technical Standards Branch

Alberta
TRANSPORTATION
AND UTILITIES

Date: NOVEMBER 7, 1991

**CLASS "B" FENCING DETAILS
FOR USING METAL STAYS**

Prepared By: R.T.	Checked By: B.K.	Scale: N.T.S.	Dwg No.: CB6-2.12.MII
-------------------	------------------	---------------	-----------------------