



ELEVATION FARM GATE SPACING OF BRACE ASSEMBLIES

ON TANGENT - 400m MAX.
ON CURVES - 200m MAX.

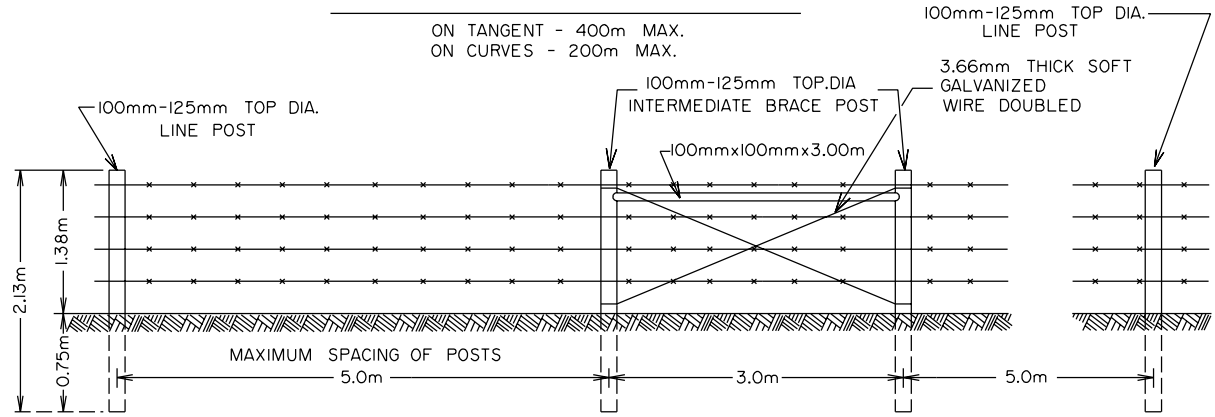

ELEVATION FENCE

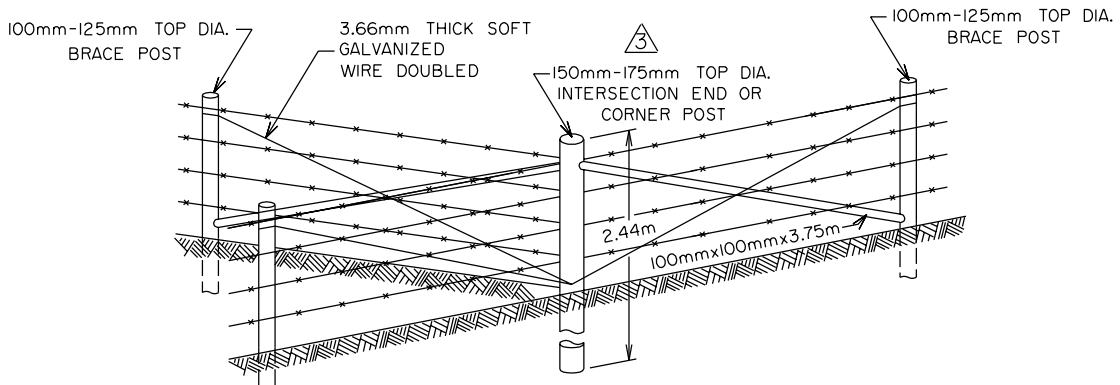

INTERSECTION

ESTIMATED MATERIAL INCLUDED IN 1km OF FENCING

LINE POSTS - 2.13m LONG AND 100 mm - 125mm TOP DIA.	200
BARBED WIRE (1 SPOOL = 402m)	10 SPOOLS
TWO STRAND BARBED WIRE (FOUR POINT GALVANIZED 2.5mm 2.5mm THICK STRANDS.)	
40mm STAPLES (APPROX. 140 STAPLES PER kg)	6 kg

ESTIMATED MATERIAL REQUIRED FOR 1 GATE

GATE STAYS - 1.2m LONG AND 55mm TOP DIA.	2
GATE, INTERSECTION, AND END CORNER POSTS	
2.44m LONG AND 150mm-175mm TOP DIA.	4
100mmx100mm DIMENSION LUMBER BRACES	7
3.66mm THICK SOFT GALVANIZED WIRE FOR DIAGONAL BRACING (APPROX. 1.5kg PER BRACE)	11 kg

NOTES:

- ALL FENCE POSTS SHALL BE PRESSURE TREATED.
- ALLOWABLE TAPER FROM END TO END OF POSTS SHALL NOT EXCEED 38mm IN DIAMETER. POSTS SHALL BE INSTALLED WITH THE LARGE END DOWN.
- SINGLE STRAND BARBED WIRE ALLOWED IF REQUESTED BY THE LANDOWNER.

3	MILL TOLERANCE FOR GATE POST ADDED	B.K	02/02
2	2 STRAND BARBED WIRE RECOMMENDED	B.K	06/96
1	MATERIAL LIST CHANGED	B.K	07/95
No.	REVISIONS	BY	DATE

Approved:

ORIGINAL SIGNED BY ALLAN KWAN

Executive Director, Technical Standards Branch

Date: May 26, 1993

CLASS "G" FENCE

CLASS "B" WITH MODIFIED POST SPACING

Prepared By: M.K.	Checked By: B.K	Scale: N.T.S.	Dwg No.: CB6-2.12M8
-------------------	-----------------	---------------	---------------------