



### CROSS-SECTION

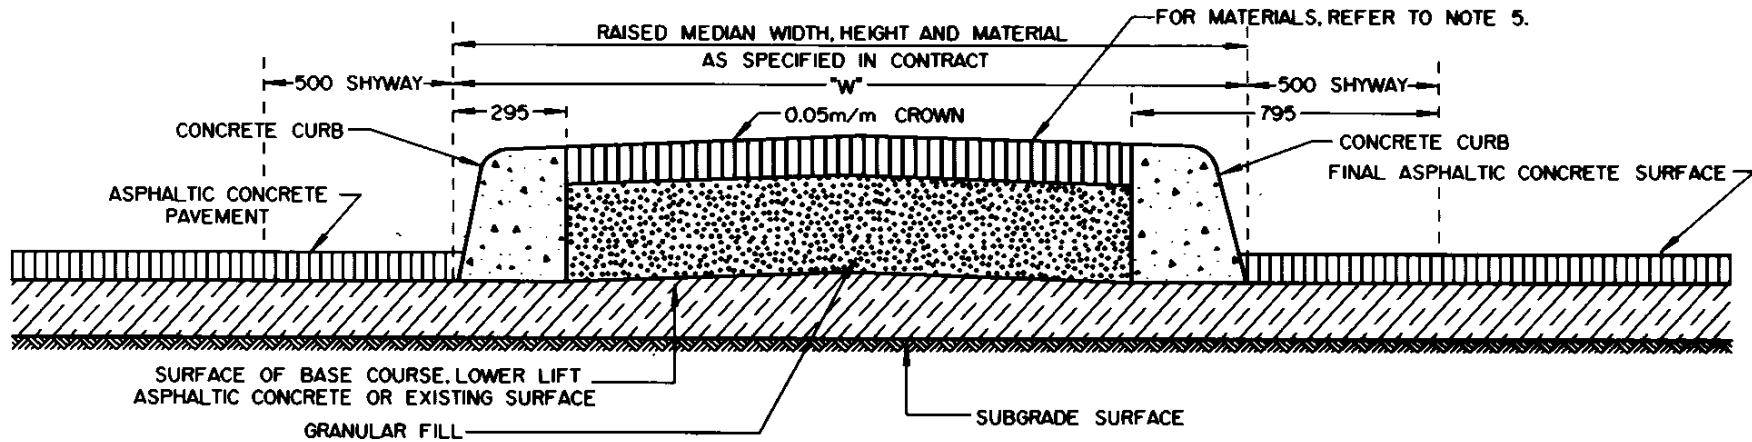

**NOTES:**

1. THE STANDARD HEIGHT OF CURB IS CURRENTLY SET AT 150mm. SEMI-MOUNTABLE OR MOUNTABLE CURB SHOULD BE USED FOR DESIGN SPEEDS IN EXCESS OF 70 KM/H.
2. THE STANDARD 200mm HIGH BARRIER CURB IS NOT CURRENTLY RECOMMENDED FOR GENERAL USE, THAT IS, SHOULD ONLY BE USED IN SPECIAL CASES TO TIE-IN WITH EXISTING CURB.
3. EXPANSION JOINTS TO BE PLACED DIRECTLY OVER BRIDGE DECK EXPANSION JOINTS AND AT POINT OF CURVATURE FOR SHORT RADIUS CURVES ONLY.
4. CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 4.5m JOINT DEPTH SHALL AVERAGE  $\frac{D}{4}$ .
5. ACP FILL IS GENERALLY USED FOR RAISED MEDIAN BETWEEN 5m and 2m IN WIDTH. FOR "W" OF 2.0m OR LESS, CONCRETE FILL IS USED. FOR MEDIANS WIDER THAN 5m OR FOR LONGER MEDIANS, TOPSOIL FILL MAY BE USED TO PROVIDE A GRASS SURFACE.

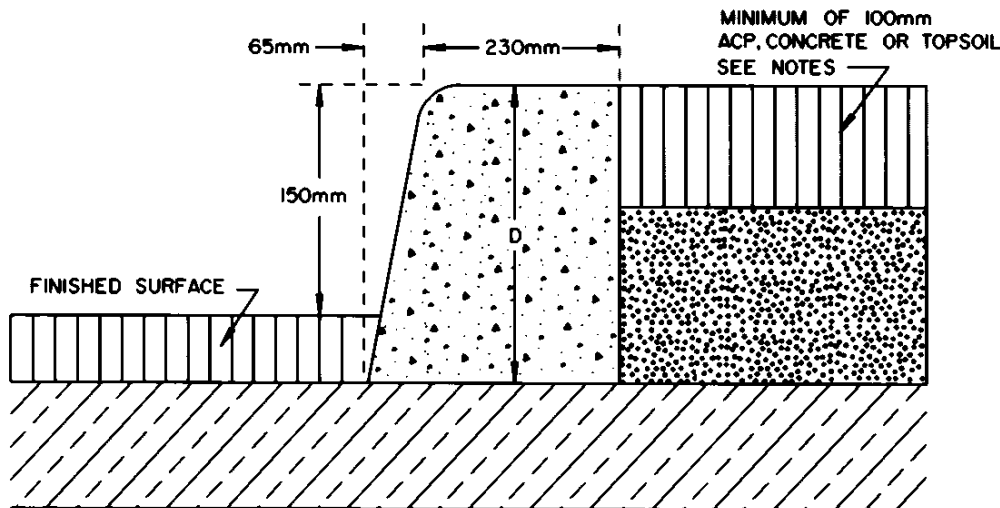

**DETAIL OF CURB**

▲				
▲				
No.	REVISIONS	BY	DATE	
Approved:  Executive Director, Roadway Engineering Branch				
Date: JUNE 22, 1994				
<h2 style="margin: 0;">RAISED MEDIAN (150mm CURB)</h2>				
Prepared By: L.T.	Checked By: B.K.	Scale: N.T.S.	Dwg No.: CB6-4.2 M47	