



CROSS-SECTION

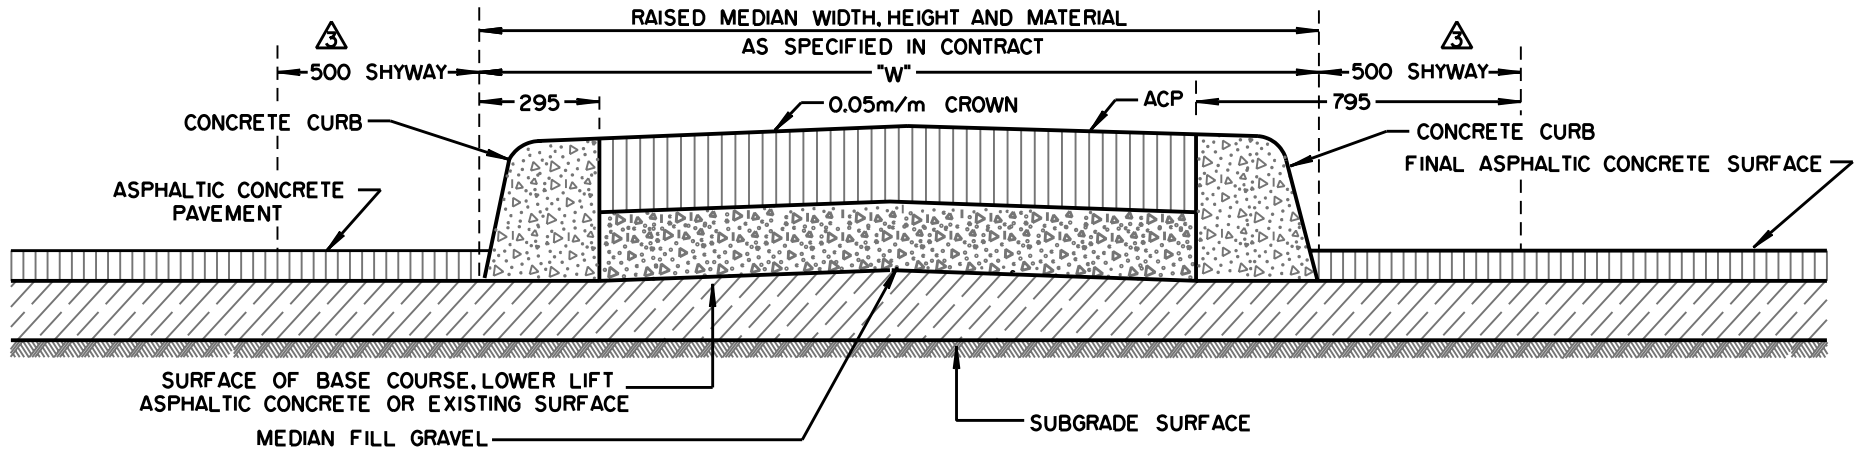

NOTES:

- THE STANDARD 200mm HIGH BARRIER CURB IS NOT CURRENTLY RECOMMENDED FOR GENERAL USE, I.E., SHOULD ONLY BE USED IN SPECIAL CASES TO TIE-IN WITH EXISTING CURB.
- THE STANDARD HEIGHT OF CURB IS CURRENTLY SET AT 150mm. SEMI-MOUNTABLE OR MOUNTABLE CURB SHOULD BE USED FOR DESIGN SPEEDS IN EXCESS OF 70 KM/H.
- EXPANSION JOINTS TO BE PLACED DIRECTLY OVER BRIDGE DECK EXPANSION JOINTS AND AT POINT OF CURVATURE FOR SHORT RADIUS CURVES ONLY.
- CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 4.5m JOINT DEPTH SHALL AVERAGE $\frac{D}{4}$.
- FOR "W" 1.0m OR LESS, USE CONCRETE MEDIAN AS PER CB-6 4.2 M56.

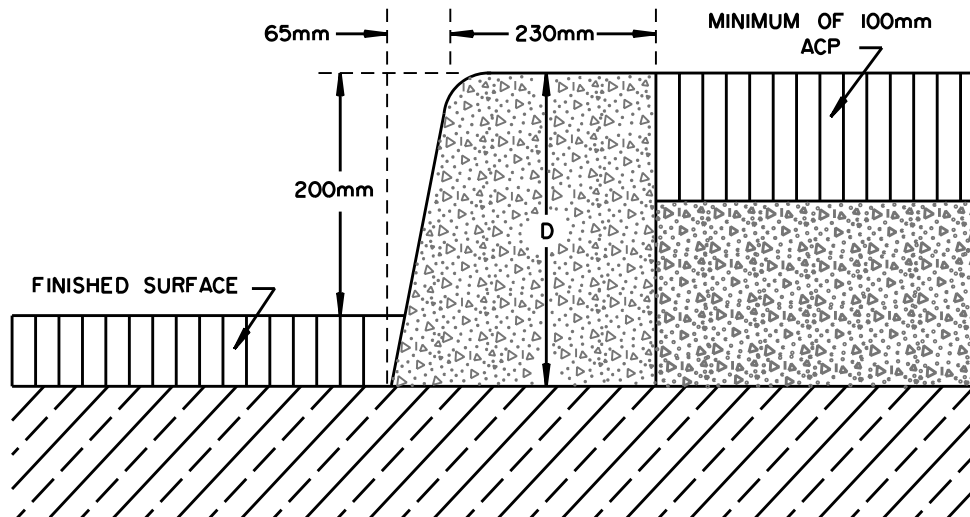

DETAIL OF CURB

Notes, Shyway, and cross section dimensions	N/A	03/31/06
		02/85
		07/81
No.	REVISIONS	BY DATE

ORIGINAL APPROVED BY
ALBERTA TRANSPORTATION
ENGINEERING DIVISION (1981)



Date: FEB. 1981

MEDIAN
(CONCRETE CURB,
ASPHALT SURFACE)

Prepared By: L.T.	Checked By: N/A	Scale: N.T.S.	Dwg No.: CB6-4.2 M47A
-------------------	-----------------	---------------	-----------------------