



SEMI-MOUNTABLE

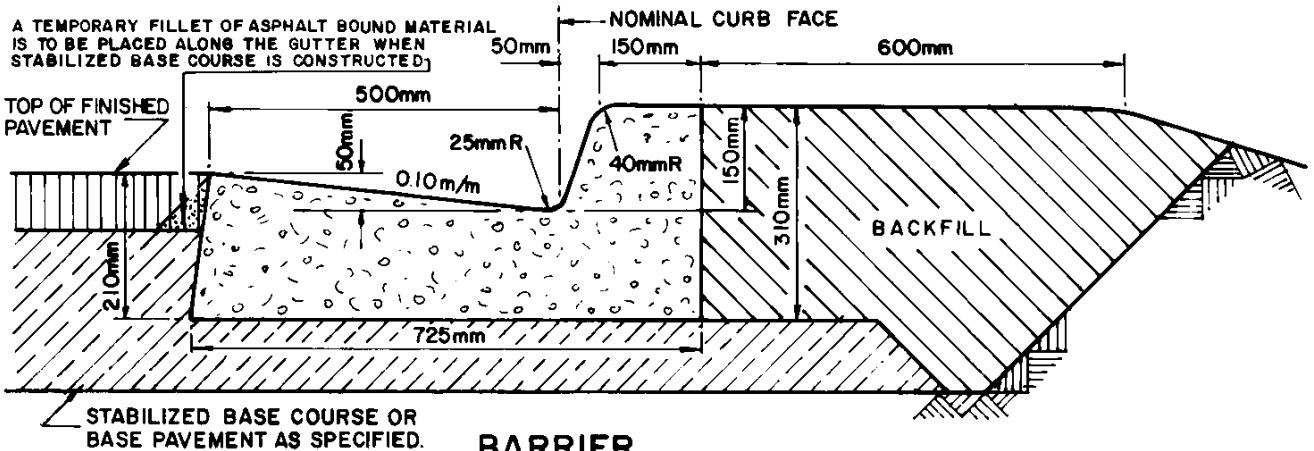

BARRIER

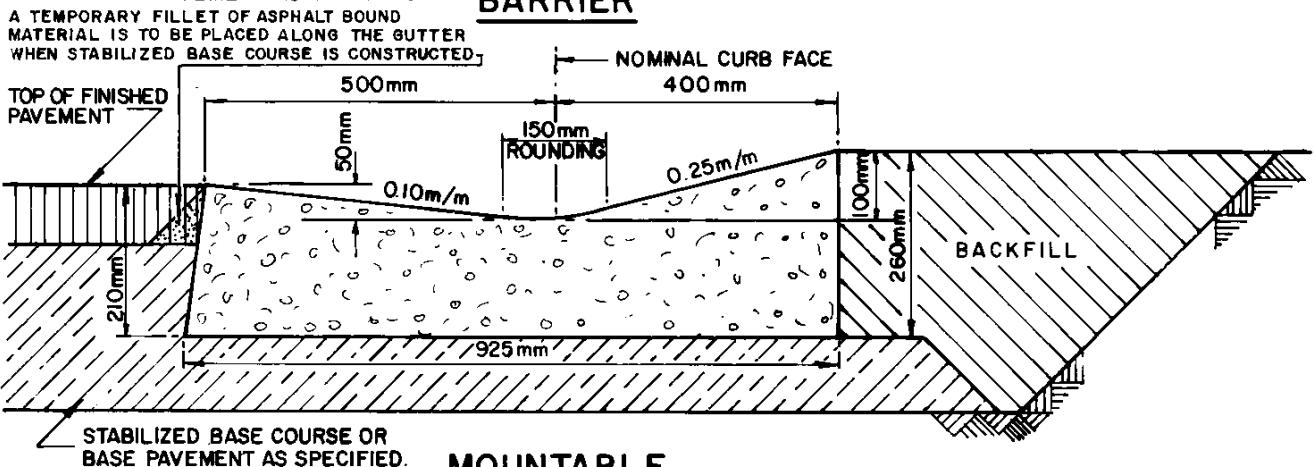

MOUNTABLE

NOTES:

- EXPANSION JOINTS TO BE PLACED AT IMMOVEABLE STRUCTURES AND AT POINTS OF CURVATURE FOR SHORT RADIUS CURVES ONLY.
- CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 4.50m. JOINT DEPTH SHALL BE AT LEAST ONE-FOURTH OF CROSS-SECTION DEPTH OF THE CONCRETE.

Alberta
TRANSPORTATION
Engineering Division

DWG. N ^o	CB - 6 4.2.M75
	Date
Original	FEB. 1985
Revised	JULY, 1986
Revised	

**POURED IN PLACE
STANDARD
150mm CURB & 500mm GUTTER**