




PLAN VIEW

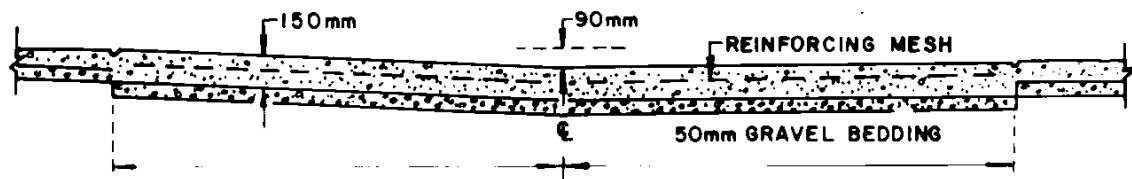

LONGITUDINAL SECTION AT BACK OF CROSSING

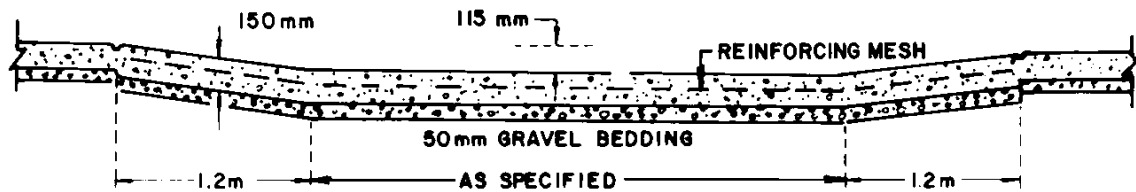

LONGITUDINAL SECTION AT FRONT OF CROSSING

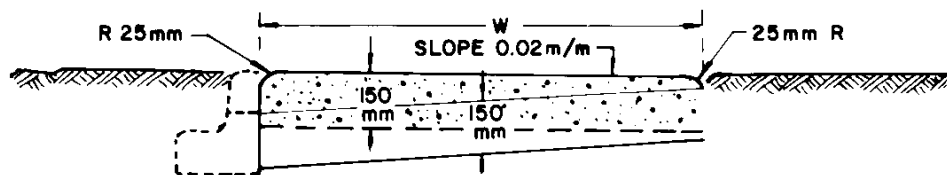

CROSS SECTION A-A

NOTES:

- WIDTH "W" AS SPECIFIED FOR THE ADJOINING SIDEWALK.
- CROSSING SHALL BE REINFORCED WITH 152 x 152 MW9.1 x MW9.1 STEEL WIRE MESH. (1.04 kg/m²)
- EXPANSION JOINTS SHALL BE PLACED DIRECTLY OVER BRIDGE DECK EXPANSION JOINTS, IMMOVABLE STRUCTURES AND AT POINTS OF CURVATURE FOR SHORT RADIUS CURVES.
- CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 3m. JOINT DEPTH SHALL BE 50mm.

Alberta

TRANSPORTATION
AND UTILITIES
Engineering Division

DWG. No.

CB - 6
4.2 M80

Date

Original

MAY, 1988

Revised

Revised

**POURED - IN - PLACE
CONCRETE SIDEWALK
PRIVATE CROSSING**