


CROSS SECTION

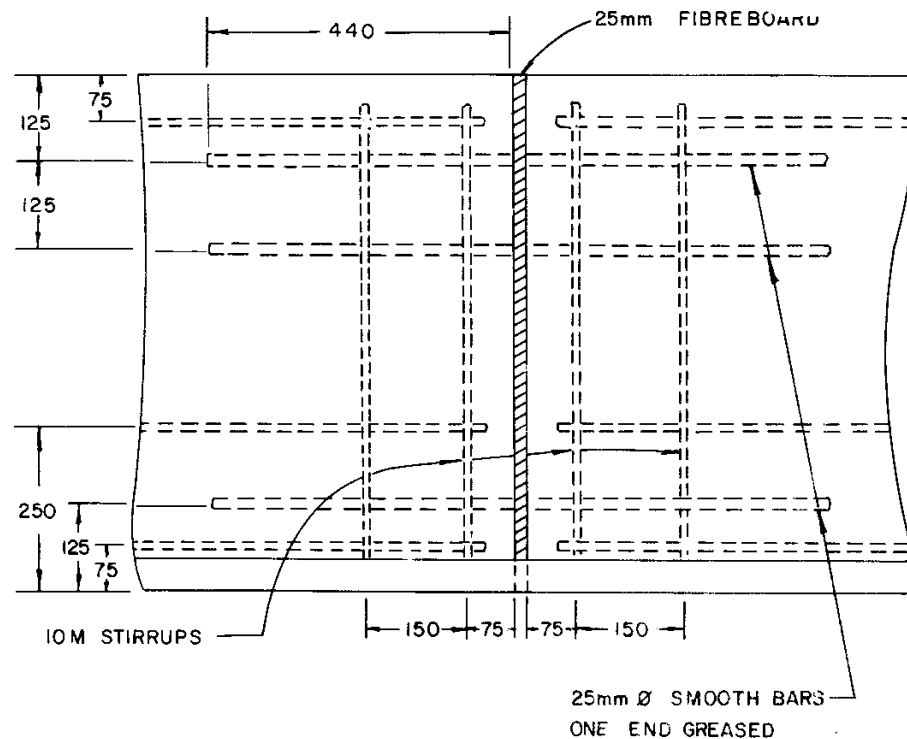

EXPANSION JOINT DETAIL

1. ALL CONCRETE SHALL BE 40MPa AT 28 DAYS.
2. ALL REINFORCEMENT SHALL BE EPOXY COATED REINFORCING BARS
3. ALL EXPOSED CONCRETE SHALL HAVE A SMOOTH SURFACE
4. EXPOSED SURFACES SHALL HAVE 20mm CHAMFER OR FILLET OR AS OTHERWISE SPECIFIED.
5. ALL SURFACES SHALL BE FORMED WITH OILED PLYWOOD OR STEEL FORMED FINISH.
6. ALL VOIDS ARE TO BE CAPPED AND WATERPROOFED.
7. EXPOSED SURFACES SHALL HAVE AN APPROVED SEALING SOLUTION APPLIED.

ALL DIMENSIONS ARE IN MILLIMETRES
UNLESS OTHERWISE NOTED

Alberta
TRANSPORTATION

DWG. NO.	4.3M2
ORIGINAL	MAY 1985

**REINFORCED CONCRETE
MEDIAN BARRIER CURB
F SHAPE**