


CROSS SECTION

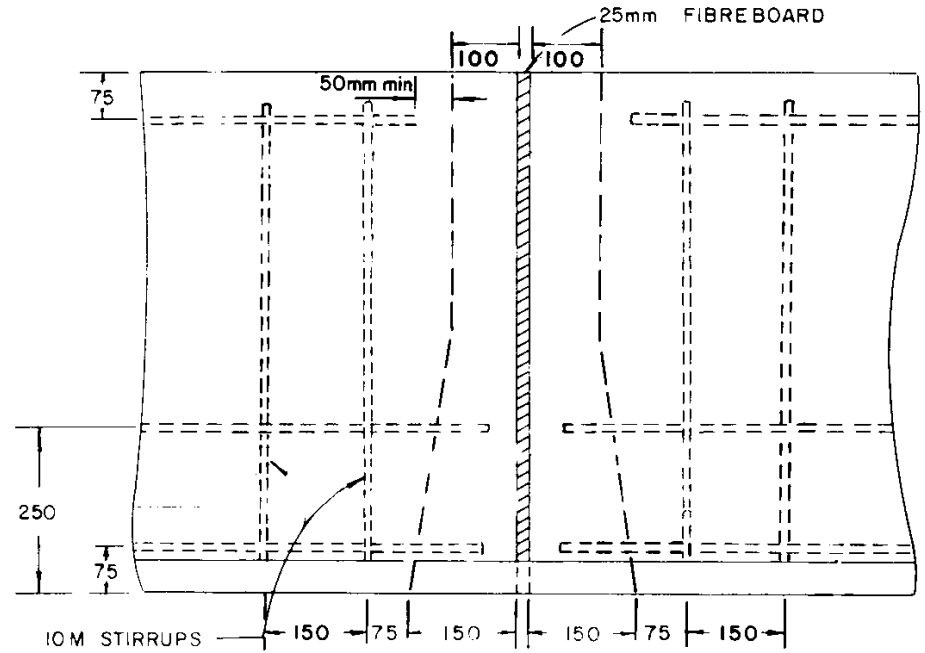

EXPANSION JOINT DETAIL

- 1 ALL CONCRETE SHALL BE 40 MPa AT 28 DAYS.
- 2 ALL REINFORCEMENT SHALL BE EPOXY COATED REINFORCING BARS
- 3 ALL EXPOSED CONCRETE SHALL HAVE A SMOOTH SURFACE
- 4 EXPOSED SURFACES SHALL HAVE 20mm CHAMFER OR FILLET OR AS OTHERWISE SPECIFIED.
- 5 ALL SURFACES SHALL BE FORMED WITH OILED PLYWOOD OR STEEL FORMED FINISH.
- 6 ALL VOIDS ARE TO BE CAPPED AND WATERPROOFED.
- 7 EXPOSED SURFACES SHALL HAVE AN APPROVED SEALING SOLUTION APPLIED.

ALL DIMENSIONS ARE IN MILLIMETRES
UNLESS OTHERWISE NOTED

	DWG. NO.	4.3M2A
	ORIGINAL	MAY 1985

**REINFORCED CONCRETE
MEDIAN BARRIER CURB
F. SHAPE**