




CLASS "A" FENCE
GENERALLY USED FOR TEMPORARY INSTALLATIONS AT BORROW AREAS, ETC.

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 2.13m LONG AND 75mm - 100mm TOP DIA. 200
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 5.9 KG.
 BARBED WIRE (1 SPOOL=402m) 7.5 SPOOLS
 (FOUR POINT GALVANIZED 2.64mm WIRE THICKNESS)

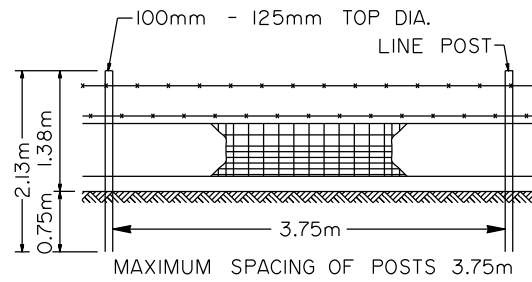


CLASS "D" FENCE
GENERALLY USED FOR FARM YARD AND SHEEP ENCLOSURES

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 2.13m LONG AND 100mm - 125mm TOP DIA. 267
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 22 KG.
 BARBED WIRE (1 SPOOL=402m) 5 SPOOLS
 (FOUR POINT GALVANIZED 2.64mm WIRE THICKNESS)
 PAIGE WIRE - AVAILABLE IN 20 ROD ROLLS ONLY

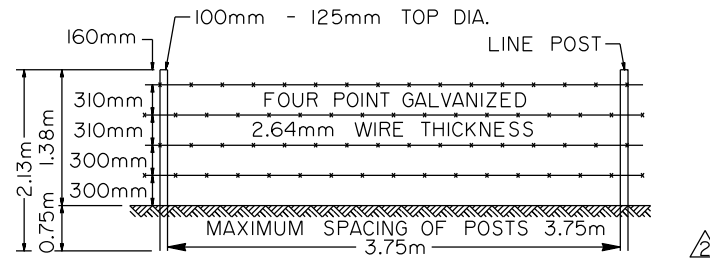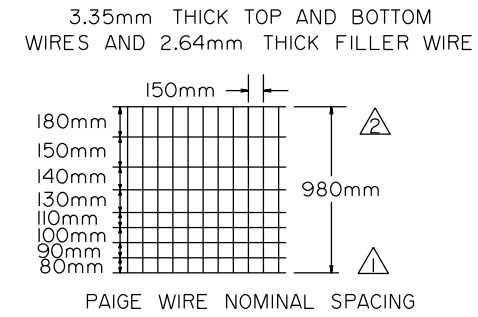



CLASS "B" FENCE
GENERALLY USED FOR PRIMARY HIGHWAYS

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 2.13m LONG AND 100mm - 125mm TOP DIA. 267
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 8.0 KG.
 BARBED WIRE (1 SPOOL=402m) 10 SPOOLS
 (FOUR POINT GALVANIZED 2.64mm WIRE THICKNESS)

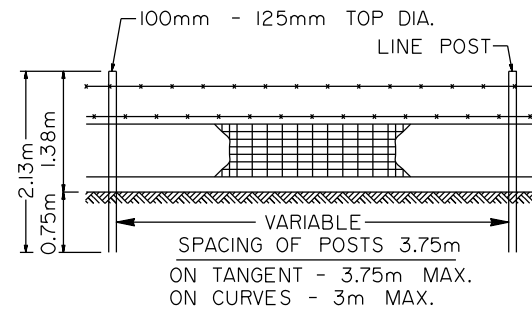


CLASS "E" FENCE
GENERALLY USED FOR RANCHING AREAS

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 2.13m LONG AND 100mm - 125mm TOP DIA. 267
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 19 KG.
 BARBED WIRE (1 SPOOL=402m) 5 SPOOLS
 (FOUR POINT GALVANIZED 2.64mm WIRE THICKNESS)
 PAIGE WIRE - AVAILABLE IN 20, 30 AND 40 ROD ROLLS ONLY

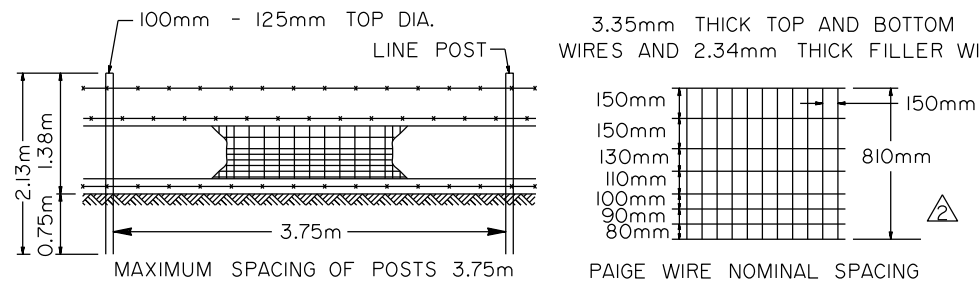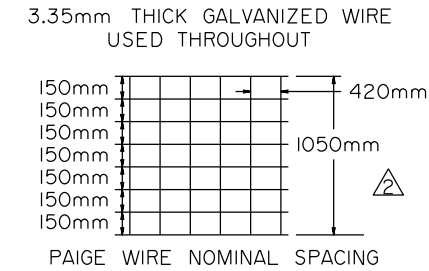


CLASS "C" FENCE
GENERALLY USED FOR HOG ENCLOSURES

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 2.13m LONG AND 100mm - 125mm TOP DIA. 267
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 22.0 KG.
 BARBED WIRE (1 SPOOL=402m) 7.5 SPOOLS
 (FOUR POINT GALVANIZED 2.64mm WIRE THICKNESS)
 PAIGE WIRE - AVAILABLE IN 20 ROD ROLLS ONLY

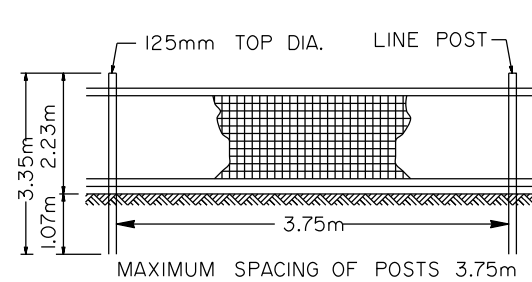

CLASS "F" FENCE
USED IN PARKS IN SPECIAL CASES

MATERIAL REQUIRED FOR 1km OF FENCING
 LINE POSTS - 3.35m LONG AND 125mm TOP DIA. 267
 40mm STAPLES (APPROX. 140 STAPLES PER KG.) 27 KG.
 PAIGE WIRE - AVAILABLE IN 10 ROD ROLLS

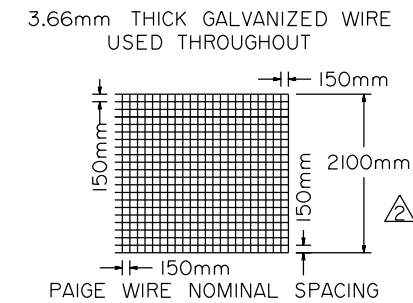

ADDITIONAL MATERIAL REQUIRED FOR EACH CLASS
 BRACE POSTS - 2.13m LONG AND 100mm - 125mm TOP DIA. EXTRA
 GATE, INTERSECTION, END AND CORNER POSTS 2.43m LONG AND 175mm TOP DIA. EXTRA
 100mm X 100mm DIMENSION LUMBER BRACES EXTRA
 3.66mm THICK SOFT GALVANIZED WIRE FOR DIAGONAL BRACING (APPROX. 1.5 KG. PER BRACE) EXTRA
 GATE STAYS - 1.2m LONG 55mm TOP DIA. EXTRA
 7 HELICAL SPIKES FOR BRACES EXTRA

- NOTES**
- THE GENERAL USE DESCRIBED FOR EACH CLASS OF FENCE IS TO BE USED AS A GUIDE BUT SPECIAL CONDITIONS MAY NECESSITATE CHANGES TO MEET LOCAL REQUIREMENT.
 - ALL FENCE POSTS SHALL BE PRESSURE TREATED
 - PAIGE WIRE FENCE TO BE SPACED AS SHOWN WITH HINGE-LOCK KNOT CONSTRUCTION
 - ALL WIRE TO BE GALVANIZED
 - NOMINAL DIMENSIONS SHOWN FOR PAIGE WIRE

△	DIMENSIONS, WIRE THICKNESS & GALVANIZATION	B.K.	05/93
△	DIMENSION LINE CORRECTION	R.T.	09/90
No.	REVISIONS	BY	DATE

Approved:

 APPROVED BY
 ALLAN KWAN (May 1993)
 Executive Director
 Technical Standards Branch
 INFRASTRUCTURE AND TRANSPORTATION
 Date: MARCH 8, 1990

OBsolete
 March, 2022
 PURPOSES AND TYPES OF FENCES

Prepared By: B.G.D.	Checked By: B.K.	Scale: N.T.S.	Dwg No: CB6-2.12M10
---------------------	------------------	---------------	---------------------