


NOTE: THE WIDTH OF CLEARING WITHIN THE PARK AREA IS TO BE KEPT TO THE ABSOLUTE MINIMUM TO ACCOMMODATE THE ROAD CONSTRUCTION.

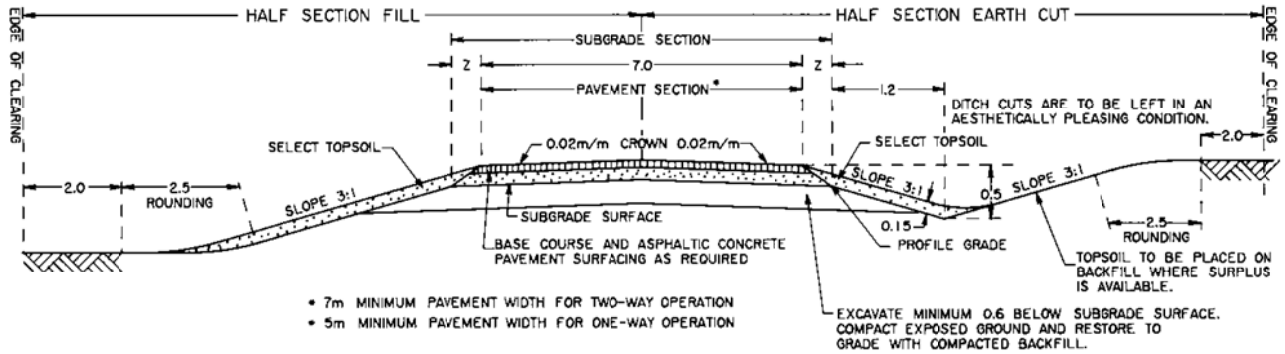


- 7m MINIMUM PAVEMENT WIDTH FOR TWO-WAY OPERATION
- 5m MINIMUM PAVEMENT WIDTH FOR ONE-WAY OPERATION

EXCAVATE MINIMUM 0.6 BELOW SUBGRADE SURFACE. COMPACT EXPOSED GROUND AND RESTORE TO GRADE WITH COMPACTED BACKFILL.

TOTAL BASE COURSE AND PAVEMENT THICKNESS AT CENTER LINE	TOTAL SUBGRADE WIDTH EQUALS PAVEMENT SECTION WIDTH PLUS 2 Z
*"	*Z"
0.10 - 0.15	0.6
0.15 - 0.25	1.0
0.25 - 0.30	1.2

DETAIL FOR PLACING TOPSOIL ON GRADING AND GRAVEL SURFACING CONTRACT

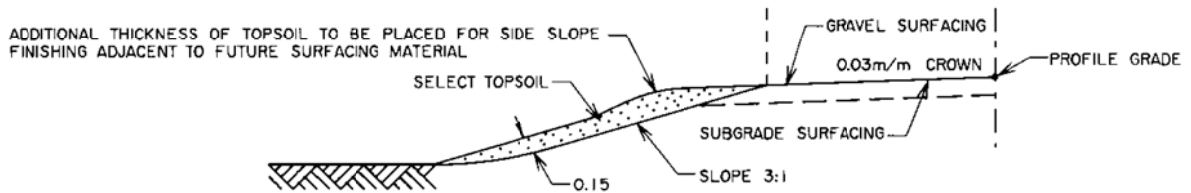

USE OF TOPSOIL

SELECT TOPSOIL SHALL BE REMOVED WITHIN THE CONSTRUCTION LIMITS TO THE DEPTH AND WIDTH AS DIRECTED BY THE ENGINEER AND THE SALVAGED TOPSOIL STOCKPILED AT DESIGNATED POINTS WITHIN THE RIGHT-OF-WAY LIMITS FOR REDISTRIBUTION ON CUT OR FILL SLOPES AS REQUIRED.

WHERE DETERMINED FEASIBLE, THE ENGINEER WILL REQUIRE THE EXCAVATED SELECT TOPSOIL TO BE MOVED DIRECTLY TO ITS FINAL POSITION WITHOUT DOUBLE HANDLING.

SURPLUS TOPSOIL AND OTHER MATERIALS DESIGNATED BY THE ENGINEER AS BEING UNSUITABLE FOR SALVAGE SHALL BE UTILIZED FOR CONSTRUCTION OF THE CUT OR FILL SLOPES AS INDICATED ON THE PLAN.

REFER TO SPECIFICATIONS FOR DETAILS REGARDING PLACEMENT OF TOPSOIL ON MEDIAN SLOPES, CUT SLOPES AND FILL SLOPES.

Alberta TRANSPORTATION Engineering Division	DWG. No.	C 6-2.3M36
	Issue	OCT.1985
	Revision	DEC.1986
	Revision	
STANDARD CROSS SECTION FOR RECREATIONAL ACCESS ROAD RLU-207P		

OBSOLETE
March 2022