


# CONCRETE SLOPE PROTECTION.


DIMENSIONS ARE GIVEN IN mm.

N.T.S.


⚠ 152 x 152 MW 25.8 x MW 25.8 WELDED WIRE MESH IN SHEETS. WIRE MESH TO BE LAPPED 152 mm, CONCRETE TO BE CLASS "A".

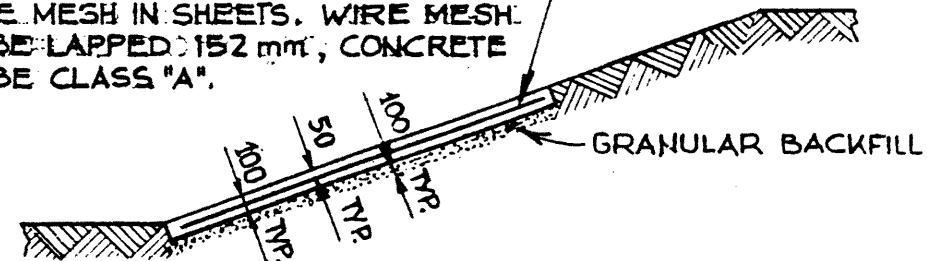

## WITHOUT TOP OR TOE CUT - OFF WALLS.

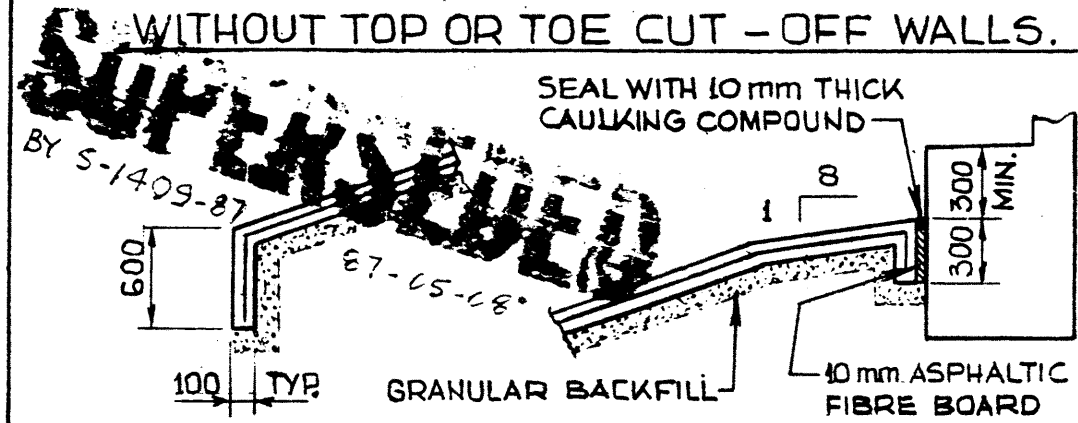


## TOE AND TOP CUT - OFF WALL

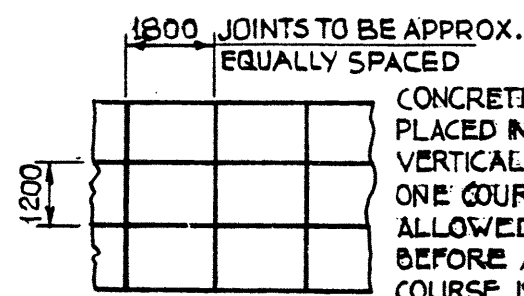

CONCRETE SHALL BE PLACED IN HORIZONTAL OR VERTICAL COURSES, WITH ONE COURSE BEING ALLOWED TO SET UP BEFORE ADJOINING COURSE IS PLACED.

ALL JOINTS TO BE FORMED WITH SIDEWALK TYPE GROOVING TOOL. SLAB TO BE GIVEN CLASS 4 SIDE WALK FINISH.

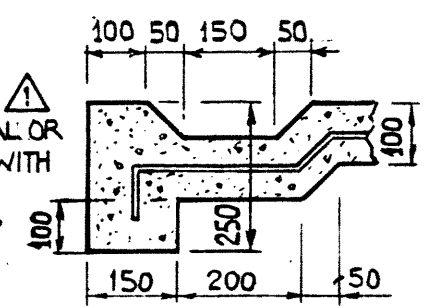

## EDGE DETAIL

APPROVED *[Signature]* CHIEF BRIDGE ENGINEER

**METRIC S-1409**

⚠ NOTES REVISED - 86-03-05 JCY

**SUPERSEDED**  
BY S-1409-87  
(87-03-23) REO

②