


CONCRETE SLOPE PROTECTION.


DIMENSIONS ARE GIVEN IN. mm.

N.T.S.


150x150-4/4 WELDED WIRE MESH IN ROLLS 1500 mm WIDE. WIRE MESH TO BE LAPPED 150 mm, CONCRETE TO BE CLASS 'A'.

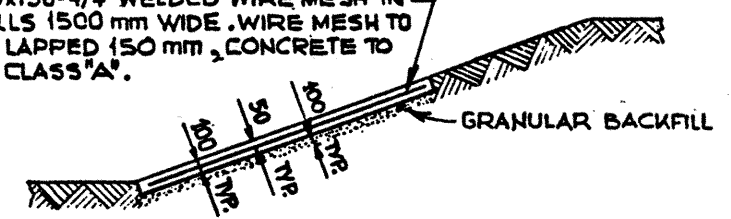

WITHOUT TOP OR TOE CUT - OFF WALLS.

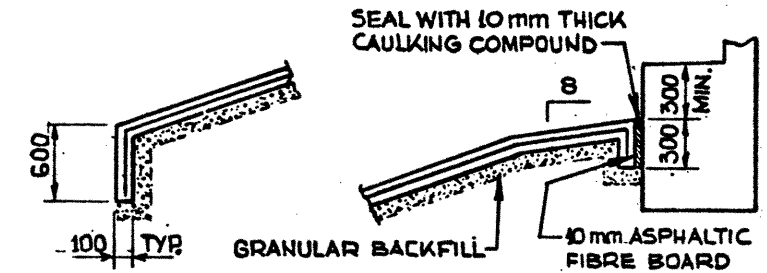

TOE AND TOP CUT - OFF WALL

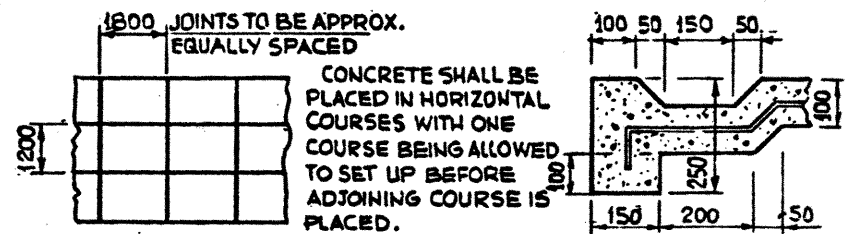

CONCRETE SHALL BE PLACED IN HORIZONTAL COURSES WITH ONE COURSE BEING ALLOWED TO SET UP BEFORE ADJOINING COURSE IS PLACED.

ALL JOINTS TO BE FORMED WITH SIDEWALK TYPE GROOVING TOOL. SLAB TO BE GIVEN CLASS 4 SIDE WALK FINISH. RECTANGULAR BLOCKS ARE TO BE MAINTAINED ON SKEW BRIDGES.

EDGE DETAIL

APPROVED *[Signature]*
CHIEF BRIDGE ENGINEER
METRIC S-1409

SUPERSEDED
BY S-1409 REV. 1
(86-03-05)

1