



SQUARE PLAN

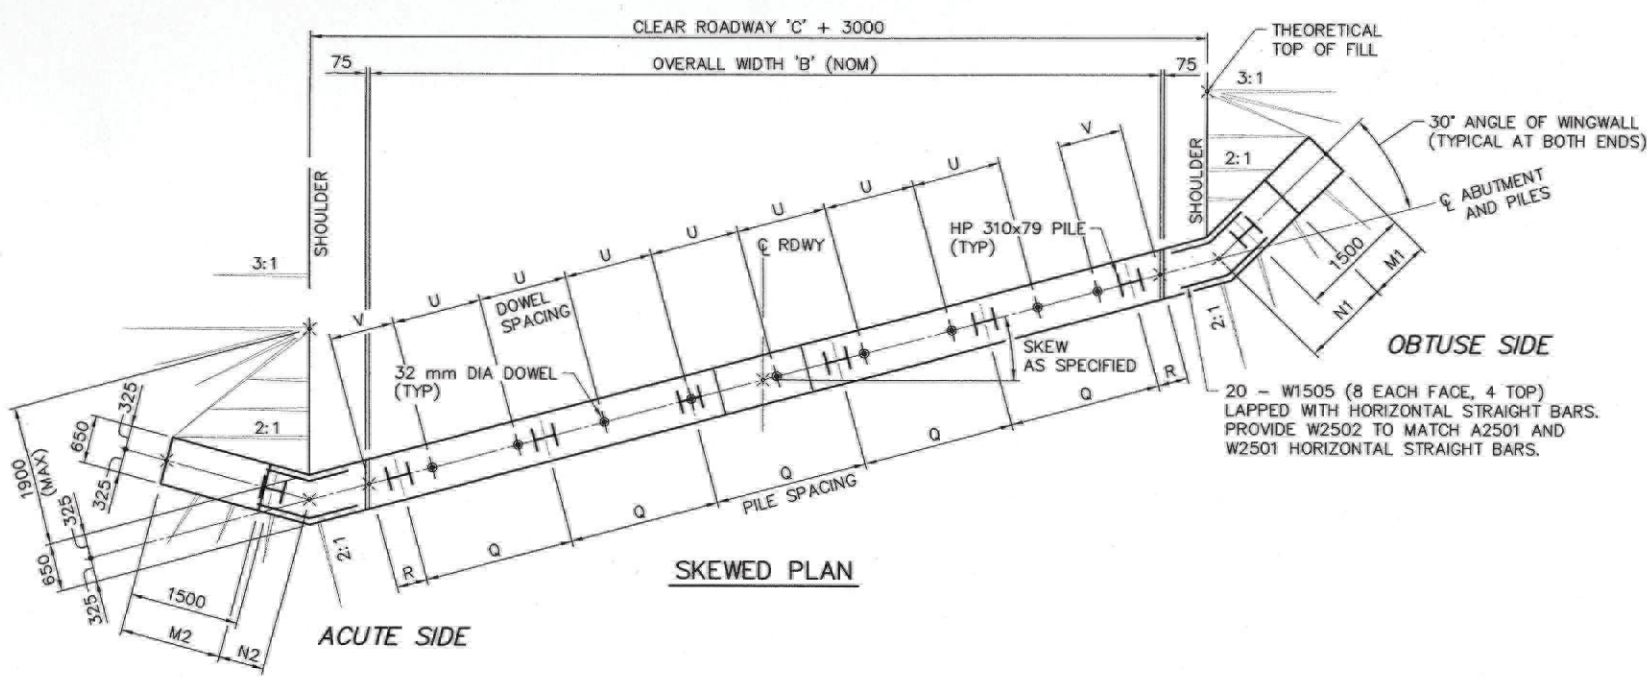

SKewed PLAN

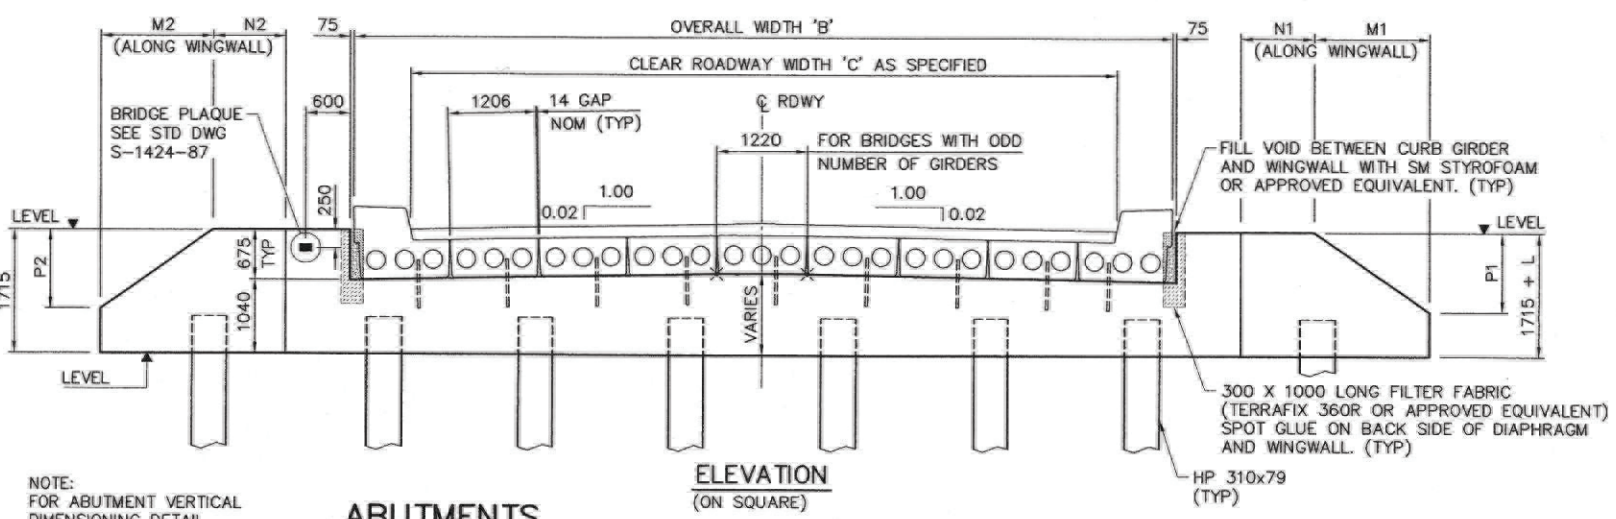


ELEVATION (ON SQUARE)

ABUTMENTS

1:50


NOTE:
FOR ABUTMENT VERTICAL
DIMENSIONING DETAIL,
SEE DWG S-1696-05.

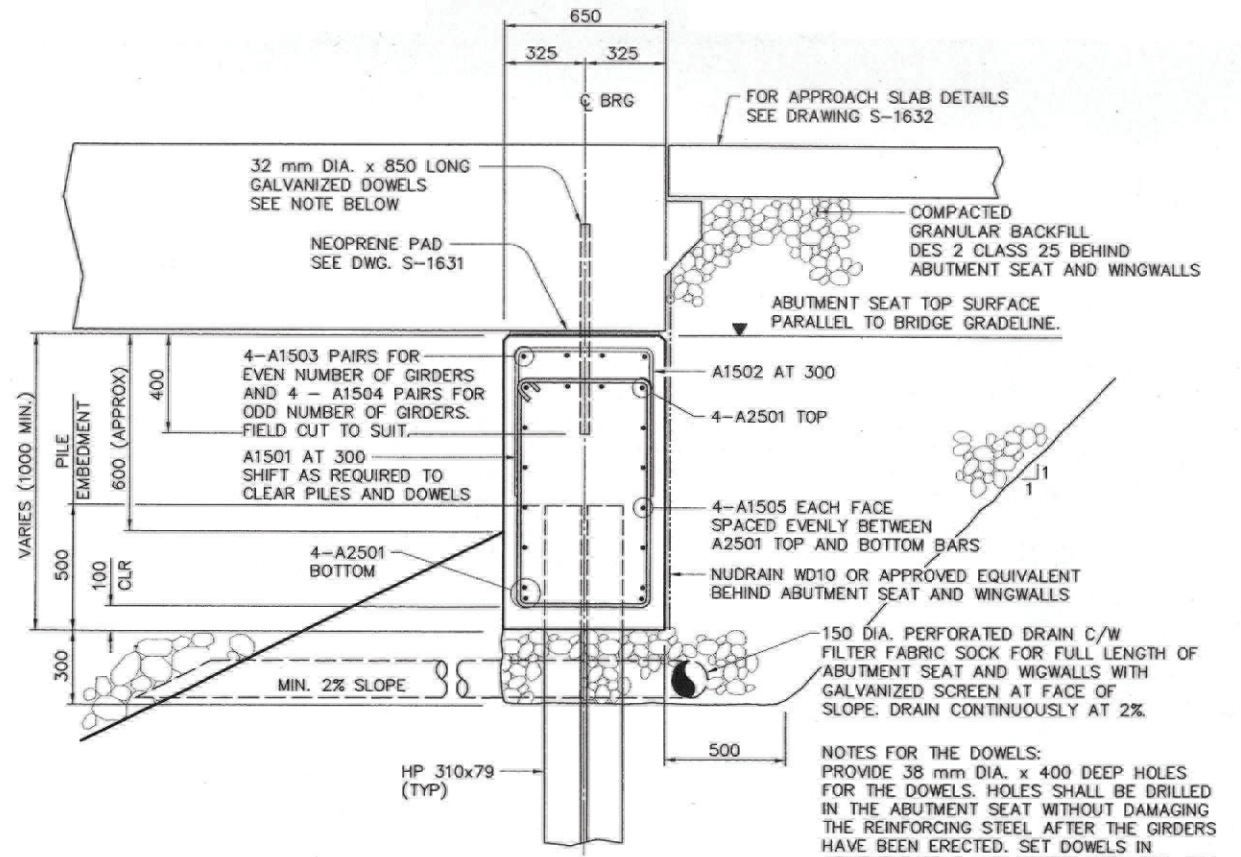

TYPICAL ABUTMENT SECTION

1:15

NOTES FOR THE DOWELS:
PROVIDE 38 mm DIA. x 400 DEEP HOLES FOR THE DOWELS. HOLES SHALL BE DRILLED IN THE ABUTMENT SEAT WITHOUT DAMAGING THE REINFORCING STEEL AFTER THE GIRDERS HAVE BEEN ERECTED. SET DOWELS IN ABUTMENT SEAT AND GIRDER WITH SIKA 212 FLOWABLE GROUT OR APPROVED EQUIVALENT. PRE-WET HOLES AS PER SIKA 212 PRODUCT DATA SHEET.

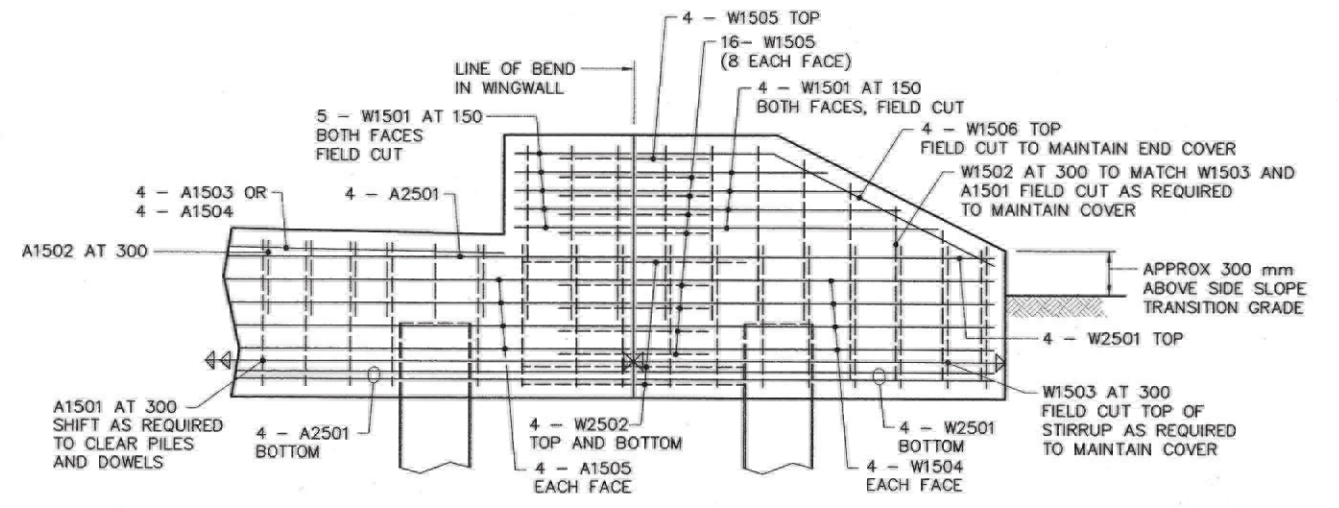

TYPICAL WINGWALL ELEVATION

1:25

**SUPERSEDED BY S-1697-05
REVISION 1, 2005-09-13**

							<p>SCC PRECAST GIRDER BRIDGES WITH CAST-IN-PLACE CONCRETE SUBSTRUCTURES - SHT 2</p>		
<p>DATE: AUG. 9, 2005</p>		<p>DATE: August 9, 2005</p>		<p>DATE: August 16, 2005</p>	<p>DATE: August 16, 2005</p>	<p>DEPARTMENT BAR CODE: 2005-08-09</p>	<p>DATE: 2005-08-09</p>	<p>SHEET: 2 of 4</p>	<p>DRAWING: S-1697-05</p>