


Dia. - In. or Pi Periphery	H in Feet - For Belvels of			"V" in feet for belvels of *			"X" in Feet for Belvels of *		
	1½: 1	2:1	3:1	1½: 1	2:1	3:1	1½: 1	2:1	3:1
60	6.0	6.0	8.0	4.0	3.0	2.7	.5	1.0	1.2
66	6.0	6.0	8.0	4.0	3.0	2.7	.8	1.2	1.4
72	6.0	8.0	12.0	4.0	4.0	4.0	1.0	1.0	1.0
78	6.0	6.0	12.0	4.0	3.0	4.0	1.2	1.2	1.2
84	6.0	8.0	12.0	4.0	4.0	4.0	1.5	1.5	1.5
90	6.0	8.0	12.0	4.0	4.0	4.0	1.8	1.8	1.8
96	8.0	8.0	16.0	5.3	4.0	5.3	1.4	2.0	1.4
102	8.0	8.0	14.0	5.3	4.0	4.7	1.6	2.2	1.9
108	8.0	8.0	14.0	5.3	4.0	4.7	1.8	2.5	2.2
114	8.0	14.0	14.0	5.3	7.0	4.7	2.1	1.2	2.4
120	8.0	14.0	18.0	5.3	7.0	6.0	2.4	1.5	2.0
126	8.0	14.0	18.0	5.3	7.0	6.0	2.6	1.8	2.2
132	12.0	14.0	18.0	8.0	7.0	6.0	1.5	2.0	2.5
138	12.0	16.0	24.0	8.0	8.0	8.0	1.8	1.8	1.8
144	12.0	12.0	20.0	8.0	6.0	6.7	2.0	3.0	2.6
150	12.0	16.0	24.0	8.0	8.0	8.0	2.2	2.2	2.2
156	12.0	16.0	24.0	8.0	8.0	8.0	2.5	2.5	2.5
162	12.0	16.0	24.0	8.0	8.0	8.0	2.8	2.8	2.8
168	14.0	14.0	22.0	9.3	7.0	7.3	2.4	3.5	3.3
174	14.0	14.0	24.0	9.3	7.0	8.0	2.6	3.8	3.2
180	12.0	16.0	24.0	8.0	8.0	8.0	3.5	3.5	3.5

PROVINCE OF ALBERTA

DEPARTMENT OF HIGHWAYS

DETAILS OF STANDARD END SECTIONS FOR S.P.C.M.P. FOR ROUND AND ELLIPTICAL PIPE

F198852
AT & U - RECORDS CENTRE

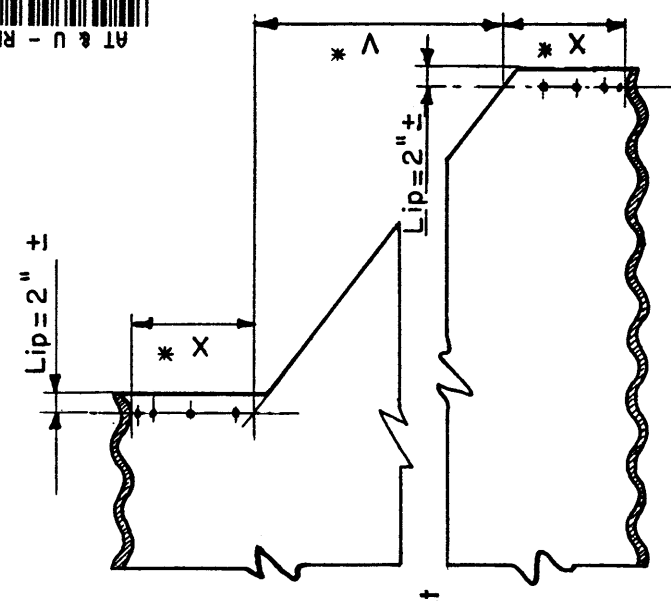

* For elliptical pipe increase vertical dimensions by percent of ellipse.

