

Site Number	Location	Name	Hwy	km
PH033	HWY 744:04 C1 59.451	CNR Slide- Judah Hill	744:04	Km 59.5
<b>Legal Description:</b>		<b>UTM Co-ordinates</b>		
2-29-83-21 W5		11U E 482662.27	N	6231329.62

<b>Current Monitoring:</b>	28-Sep-2025	<b>Previous Monitoring</b>	10-Jun-2025
<b>Instruments Read By:</b>	Mr. Niraj Regmi, G.I.T and Mr. Angelo Castillo, of Thurber		

Instruments Read During This Site Visit			
<b>Slope Inclinerometers (SIs):</b> SI10-16 and SI10-17	<b>Pneumatic Piezometers (PN):</b> PN10-16	<b>Vibrating Wire Piezometers (VW):</b>	<b>Standpipe Piezometers (SP):</b>
<b>Load Cell (LC):</b>	<b>Strain Gauges:</b>	<b>SAA's:</b>	<b>Others:</b>

Readout Equipment Used			
<b>Slope Inclinerometers:</b> Two RST Digital Inclinerometer probes with 2 ft. wheelbases and RST Pocket PC readouts	<b>Pneumatic Piezometers:</b> RST C108 pneumatic piezometer readout	<b>Vibrating Wire Piezometers:</b>	<b>Standpipe Piezometers:</b>
<b>Load Cell:</b>	<b>Strain Gauges:</b>	<b>SAA's:</b>	<b>Others:</b>

Discussion	
<b>Zones of New Movement:</b>	None
<b>Interpretation of Monitoring Results:</b>	SI10-16 showed a rate of movement of 1.8 mm/yr over 11.7 m to 13.5 m depth since the spring of 2025 readings. SI10-17 showed a rate of movement of 0.4 mm/yr over 9.5 m to 11.3 m depth since the spring of 2025 readings. SI10-16 and SI10-17 are both shearing near the bottom of a stiff clay strata just above a clay shale strata.  Pneumatic piezometer PN10-16 showed an increase in groundwater level of 0.09 m since the spring of 2025 readings.
<b>Future Work:</b>	The instruments should be read again in the spring of 2026.
<b>Instrumentation Repairs:</b>	No instrument repairs are required.
<b>Additional Comments:</b>	

<p><b>Attachments:</b></p>	<ul style="list-style-type: none"> <li>▪ Table PH033-1-1 Fall 2025 – HWY 744:04 Judah Hill CNR Slide Slope Inclinator Instrumentation Reading Summary</li> <li>▪ Table PH033-1-2: Fall 2025 – HWY 744:04 Judah Hill CNR Slide Pneumatic Piezometer Instrumentation Reading Summary</li> <li>▪ Statement for Use and Interpretation of Report</li> <li>▪ APPENDIX A - PH033 FALL 2025 <ul style="list-style-type: none"> <li>□ Field Inspector's report</li> <li>□ Site Plan Showing Approximate Instrument Locations (Drawing No. 32121-PH033-1)</li> <li>□ SI Reading Plots</li> <li>□ Figure PH033-1 (Judah Hill CNR Slide Pneumatic Piezometer Readings)</li> </ul> </li> </ul>
----------------------------	--

We trust this report meets your requirements at present. If you have any questions, please contact the undersigned at your convenience.

Yours very truly,  
Thurber Engineering Ltd.  
Don Proudfoot, M.Eng., P. Eng.  
Partner, Senior Geotechnical Engineer

Yasir Khan, E.I.T.  
Geotechnical Engineer-In-Training

**Table PH033-1-1: Fall 2025 – HWY 744:04 Judah Hill CNR Slide Slope Inclinometer Instrumentation Reading Summary**

Date Monitored: September 28, 2025

<b>INSTRUMENT #</b>	<b>DATE INITIALIZED</b>	<b>TOTAL CUMULATIVE RESULTANT MOVEMENT AT NOTED DEPTH SINCE INITIAL READING (mm)</b>	<b>MAXIMUM RATE OF MOVEMENT (mm/yr)</b>	<b>CURRENT STATUS</b>	<b>DATE OF PREVIOUS READING</b>	<b>INCREMENTAL MOVEMENT SINCE PREVIOUS READING (mm)</b>	<b>RATE OF MOVEMENT (mm/yr)</b>	<b>CHANGE IN RATE OF MOVEMENT SINCE PREVIOUS READING (mm/yr)</b>
SI10-16	September 23, 2010	17.3 mm over 11.7 m to 13.5 m depth in 70° direction	3.4 mm/yr in June 2014	Operational	June 10, 2025	0.5	1.8	1.3
SI10-17	March 5, 2010	14.6 mm over 9.5 m to 11.3 m depth in 68° direction	3.3 mm/yr in June 2014	Operational	June 10, 2025	0.1	0.4	-0.2

Drawings 32121-PH033-1 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.

**Table PH033-1-2: Fall 2025 – HWY 744:04 Judah Hill CNR Slide Pneumatic Piezometer Instrumentation Reading Summary**

Date Monitored: September 28, 2025

INSTRUMENT #	DATE INITIALIZED	TIP DEPTH (m)	GROUND ELEV. (m)	CURRENT STATUS	HIGHEST MEASURED WATER LEVEL BGS (m)	MEASURED PORE PRESSURE (kPa)	CURRENT WATER LEVEL BGS (m)	PREVIOUS WATER LEVEL BGS (m)	CHANGE IN WATER LEVEL SINCE PREVIOUS READING (m)
PN10-16 (33086)	Feb. 27, 2010	14.6	N/A	Active	10.62 on May 22, 2015	27.1	11.87	11.96	0.09
PN10-17 (33081)	Feb 27, 2010	11.6	N/A	No return (DRY)	11.55 on June 10, 2012	N/A	N/A	N/A	N/A

Drawings 32121-PH033-1 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.

Notes:

PN - pneumatic piezometer

BGS - below ground surface



**ALBERTA TRANSPORTATION AND ECONOMIC CORRIDORS GRMP (CON0022164)  
PEACE REGION (PEACE RIVER DISTRICT)  
INSTRUMENTATION MONITORING RESULTS**

**FALL 2025**

**APPENDIX A  
DATA PRESENTATION**

**SITE PH033-1: HWY 744:04, JUDAH HILL (CNR SLIDE)**

## STATEMENT FOR USE AND INTERPRETATION OF REPORT

### 1. STANDARD OF CARE

This Report has been prepared in a manner consistent with that degree of care and skill ordinarily exercised by members of the same profession currently practicing under similar circumstances at the same time and in the same or similar locality and in compliance with all applicable laws.

### 2. COMPLETE REPORT

All documents, records, data and files, whether electronic or otherwise, generated as part of this assignment, including this Statement For Use and Interpretation of Report, are a part of the Report, which is of a summary nature and is not intended to stand alone without reference to the instructions given to Thurber by the Client, communications between Thurber and the Client, and any other reports, proposals or documents prepared by Thurber for the Client relative to the specific site described herein, all of which together constitute the Report.

**IN ORDER TO PROPERLY UNDERSTAND THE SUGGESTIONS, RECOMMENDATIONS AND OPINIONS EXPRESSED HEREIN, REFERENCE MUST BE MADE TO THE WHOLE OF THE REPORT, AS DESCRIBED ABOVE. THURBER IS NOT RESPONSIBLE FOR USE BY ANY PARTY OF PORTIONS OF THE REPORT WITHOUT REFERENCE TO THE WHOLE OF THE REPORT.**

### 3. BASIS OF REPORT

The Report has been prepared for the specific site, development, design objectives, and purposes that were described to Thurber by the Client. The applicability and reliability of any of the findings, recommendations, suggestions, or opinions expressed in the Report, subject to the limitations provided herein, are only valid to the extent that the Report expressly addresses proposed development, design objectives and purposes, and then only to the extent that there has been no material alteration to or variation from any of the said descriptions provided to Thurber, unless Thurber is specifically requested by the Client to review and revise the Report in light of such alteration or variation.

### 4. USE OF THE REPORT

The information and opinions expressed in the Report, or any document forming part of the Report, are for the sole benefit of the Client for the development, design objectives, and/or purposes described to Thurber by the Client. **NO OTHER PARTY MAY USE OR RELY ON THE REPORT OR ANY PORTION THEREOF FOR OTHER THAN THE CLIENT'S BENEFIT IN CONNECTION WITH THE PURPOSES DESCRIBED IN THE REPORT.** Any use which a third party makes of the Report is the sole responsibility of such third party and is always subject to this Statement for Use and Interpretation of Report. Thurber accepts no liability or responsibility for damages suffered by any third party resulting from use of the Report for purposes outside the reasonable contemplation of Thurber at the time it was prepared or in any manner unintended by Thurber.

### 5. INTERPRETATION OF THE REPORT


- a) **Nature and Exactness of Soil and Contaminant Description:** Classification and identification of soils, rocks, geological units, contaminant materials and quantities have been based on investigations performed in accordance with the standards set out in Paragraph 1. Classification and identification of these factors is inherently judgement-based. Comprehensive sampling and testing programs implemented with the appropriate equipment by experienced personnel may fail to locate some conditions. All investigations utilizing the standards of Paragraph 1 will involve an inherent risk that some conditions will not be detected and all documents or records summarizing such investigations will be based on assumptions of what exists between the actual points sampled. Actual conditions may vary significantly between the points investigated and the Client and all other parties making use of such documents or records with or without our express written consent need to be aware of this risk and the Report is delivered subject to the express condition that such risk is accepted by the Client and such other parties. Some conditions are subject to change over time and those making use of the Report need to be aware of this possibility and understand that the Report only presents the interpreted conditions at the sampled points at the time of sampling. If special concerns exist, or the Client has special considerations or requirements, the Client must disclose them so that additional or special investigations may be undertaken which would not otherwise be within the scope of investigations made for the purposes of the Report.
- b) **Reliance on Provided Information:** The evaluation and conclusions contained in the Report have been prepared based on conditions in evidence at the time of site inspections and based on information provided to Thurber. Thurber has relied in good faith upon representations, information and instructions provided by the Client and others concerning the site. Accordingly, Thurber does not accept responsibility for any deficiency, misstatement or inaccuracy contained in the Report resulting from misstatements, omissions, misrepresentations, or fraudulent acts of the Client or other parties providing information relied on by Thurber. Thurber is entitled to rely on such representations, information and instructions and is not required to carry out investigations to determine the truth or accuracy of such representations, information and instructions.
- c) **Design Services:** The Report may form part of design and construction documents for information purposes even though it may have been issued prior to final design being completed. Thurber is recommended to be retained to review final design, project plans and related documents prior to construction to confirm that they are consistent with the intent of the Report. Any differences that may exist between the Report's recommendations and the final design need to be reported to Thurber immediately so that Thurber can address potential conflicts.
- d) **Construction Services:** During construction Thurber should be retained to provide field reviews. Field reviews consist of performing sufficient and timely observations of encountered conditions to confirm and document that the site conditions do not materially differ from those conditions considered in the preparation of the report. Adequate field reviews are necessary for Thurber to provide letters of assurance, in accordance with the requirements of many regulatory authorities.

### 6. INDEPENDENT JUDGEMENTS OF CLIENT


The information, interpretations and conclusions in the Report are based on Thurber's interpretation of conditions revealed through limited investigation conducted within a defined scope of services. Thurber does not accept responsibility for independent conclusions, interpretations, interpolations and/or decisions of the Client, or other parties who may come into possession of the Report, or any part thereof, which may be based on information contained in the Report. This restriction of liability includes, but is not limited to, decisions made to develop, purchase, or sell land, unless such decisions expressly form part of the stated purpose of the Report as described in Paragraph 3.



G:\32000\32121 AT GRMP Peace River District 2021-2025\CAD\2021 INSTRUMENT\32121-PH030, PH031, PH032, PH033, PH034, PH072.dwg - 33-1 - Jul. 03, 2025

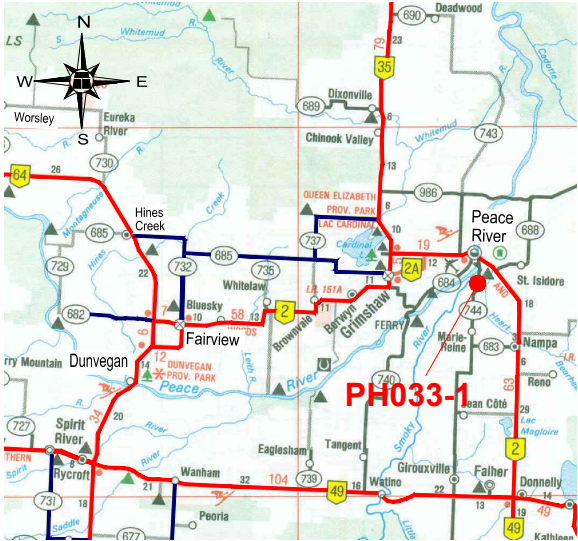

KEY MAP  
NOT TO SCALE

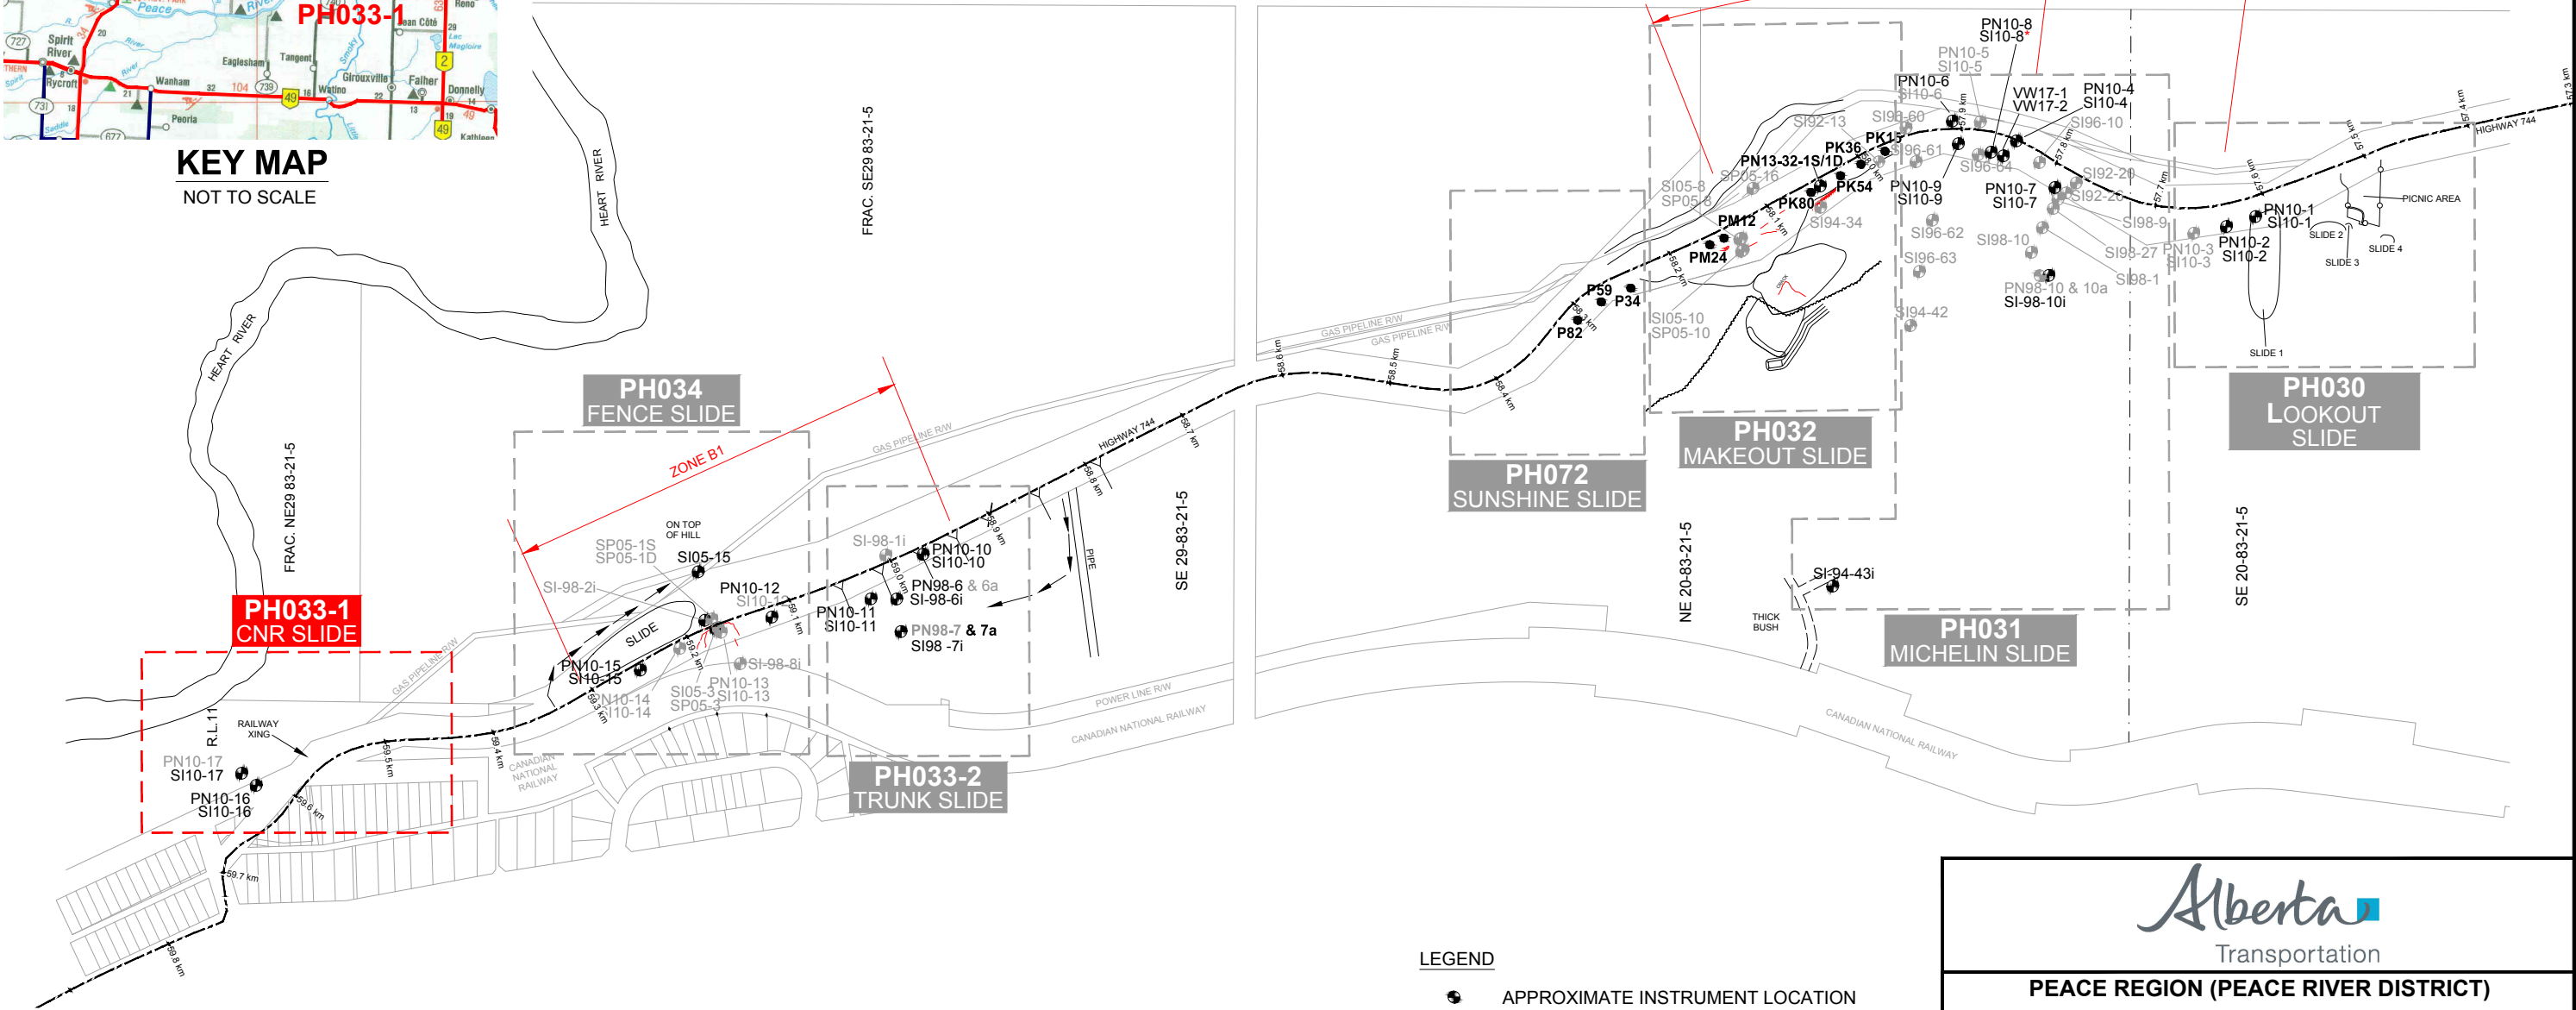

- LEGEND
- APPROXIMATE INSTRUMENT LOCATION
  - INSTRUMENT NOT IN USE
  - PN PNEUMATIC PIEZOMETER
  - SP STANDPIPE PIEZOMETER
  - SI SLOPE INCLINOMETER
  - VW VIBRATING WIRE PIEZOMETER
  - APPROXIMATE PILE LOCATION

PEACE REGION (PEACE RIVER DISTRICT)

**PH033-1: HWY 744:02 - JUDAH HILL (CNR SLIDE)**


**INSTRUMENT LOCATIONS**

DWG No. 32121-PH033-1

DRAWN BY	ML
DESIGNED BY	BWN
APPROVED BY	DWP
SCALE	APPROX. 1:6000
DATE	JULY 2025
FILE No.	32121




Thurber Engineering - Edmonton

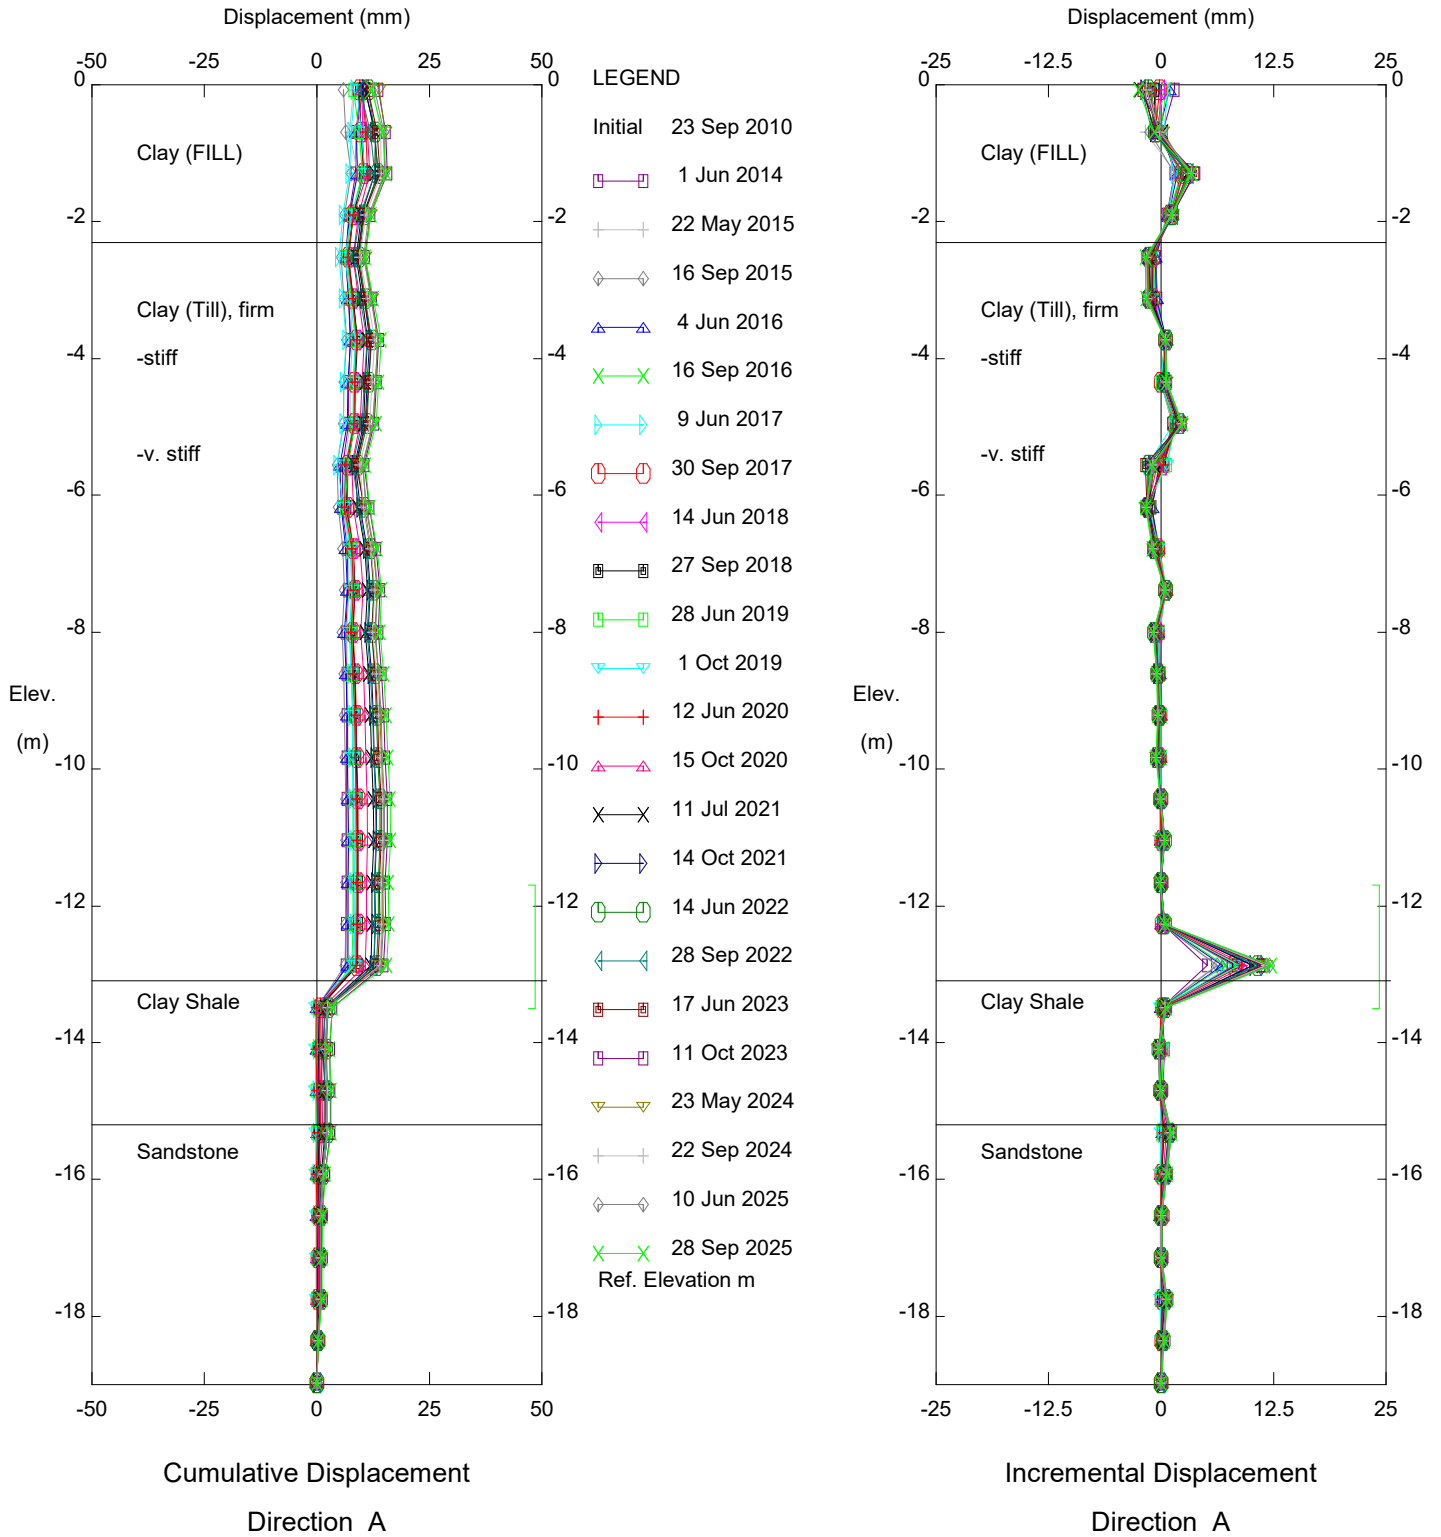

PH033-1 Judah Hill CNR Slide, Inclinometer SI10-16

Alberta Transportation


# Thurber Engineering - Edmonton

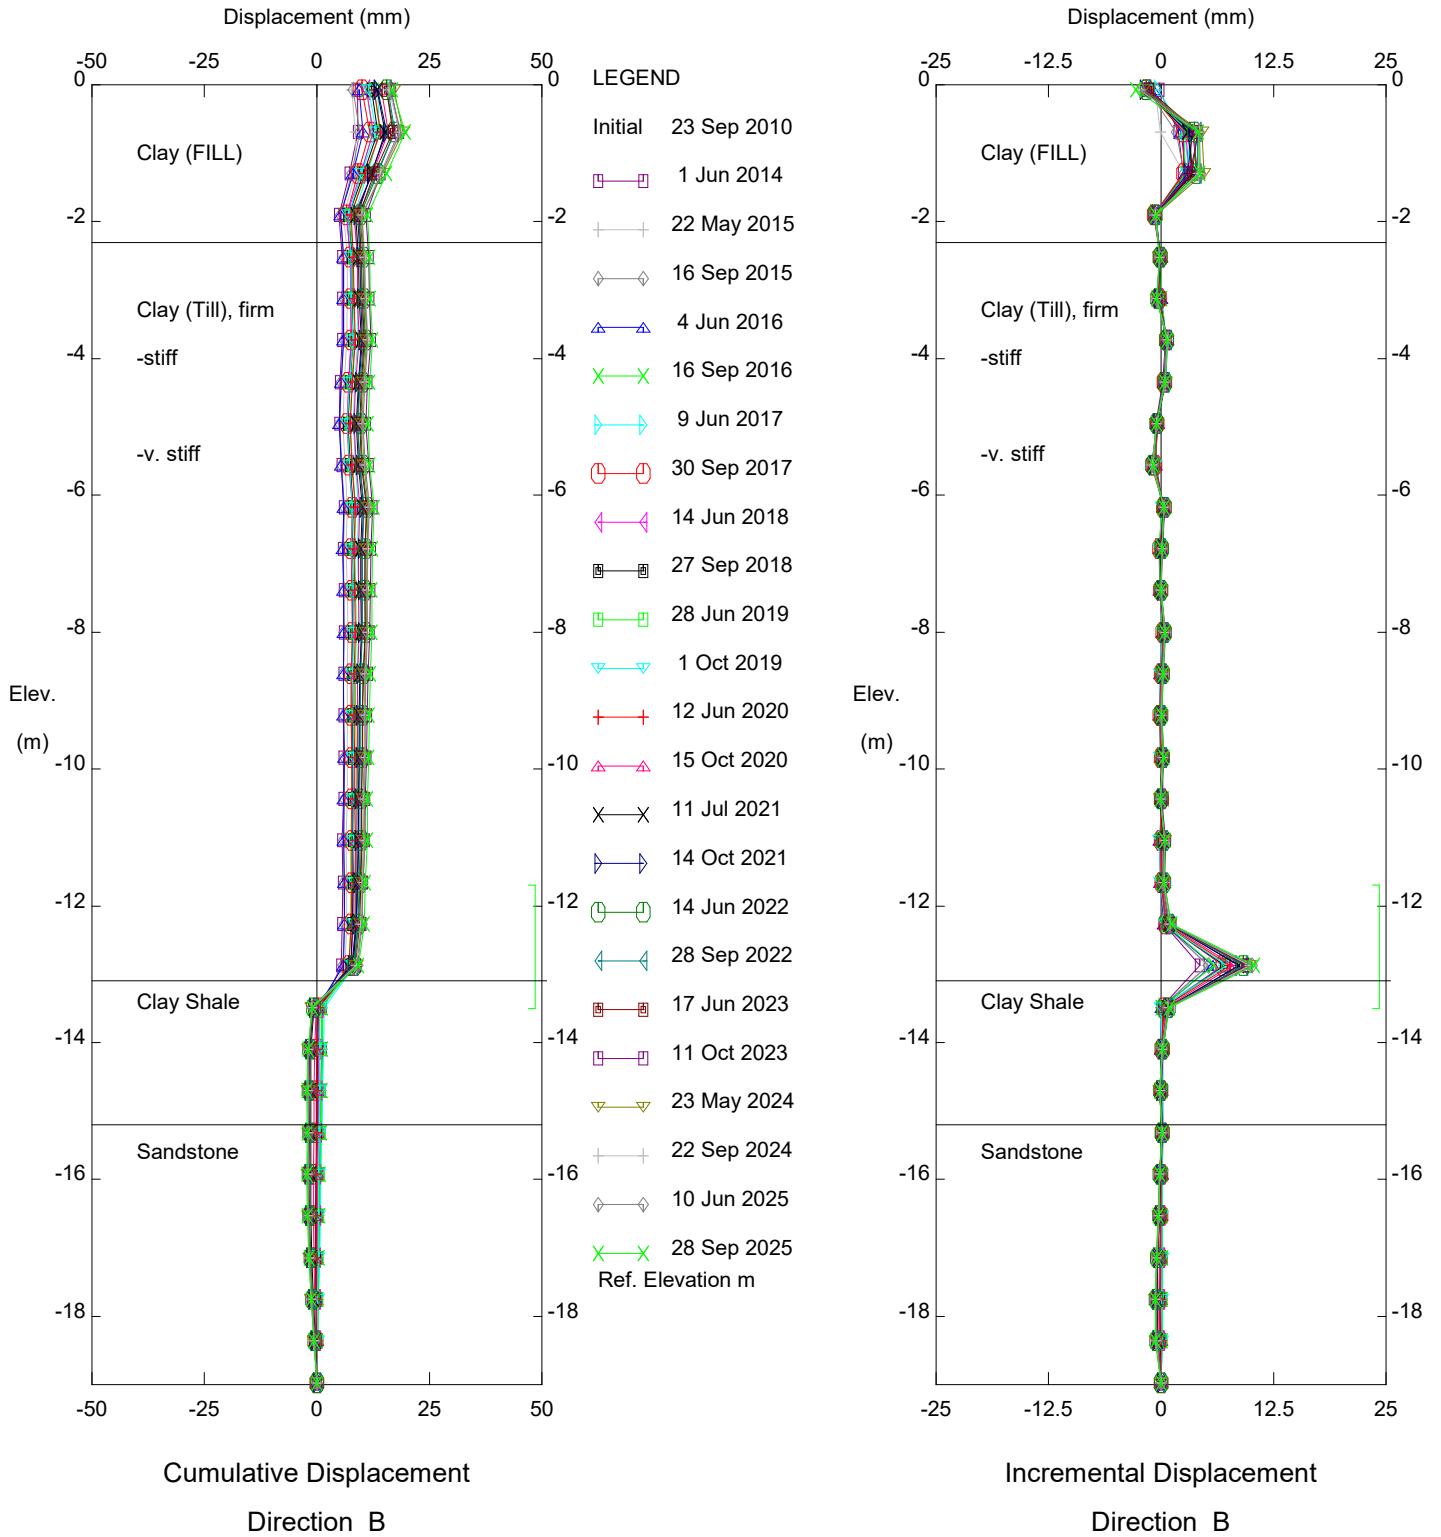

PH033-1 Judah Hill CNR Slide, Inclinometer SI10-16

Alberta Transportation


Thurber Engineering - Edmonton

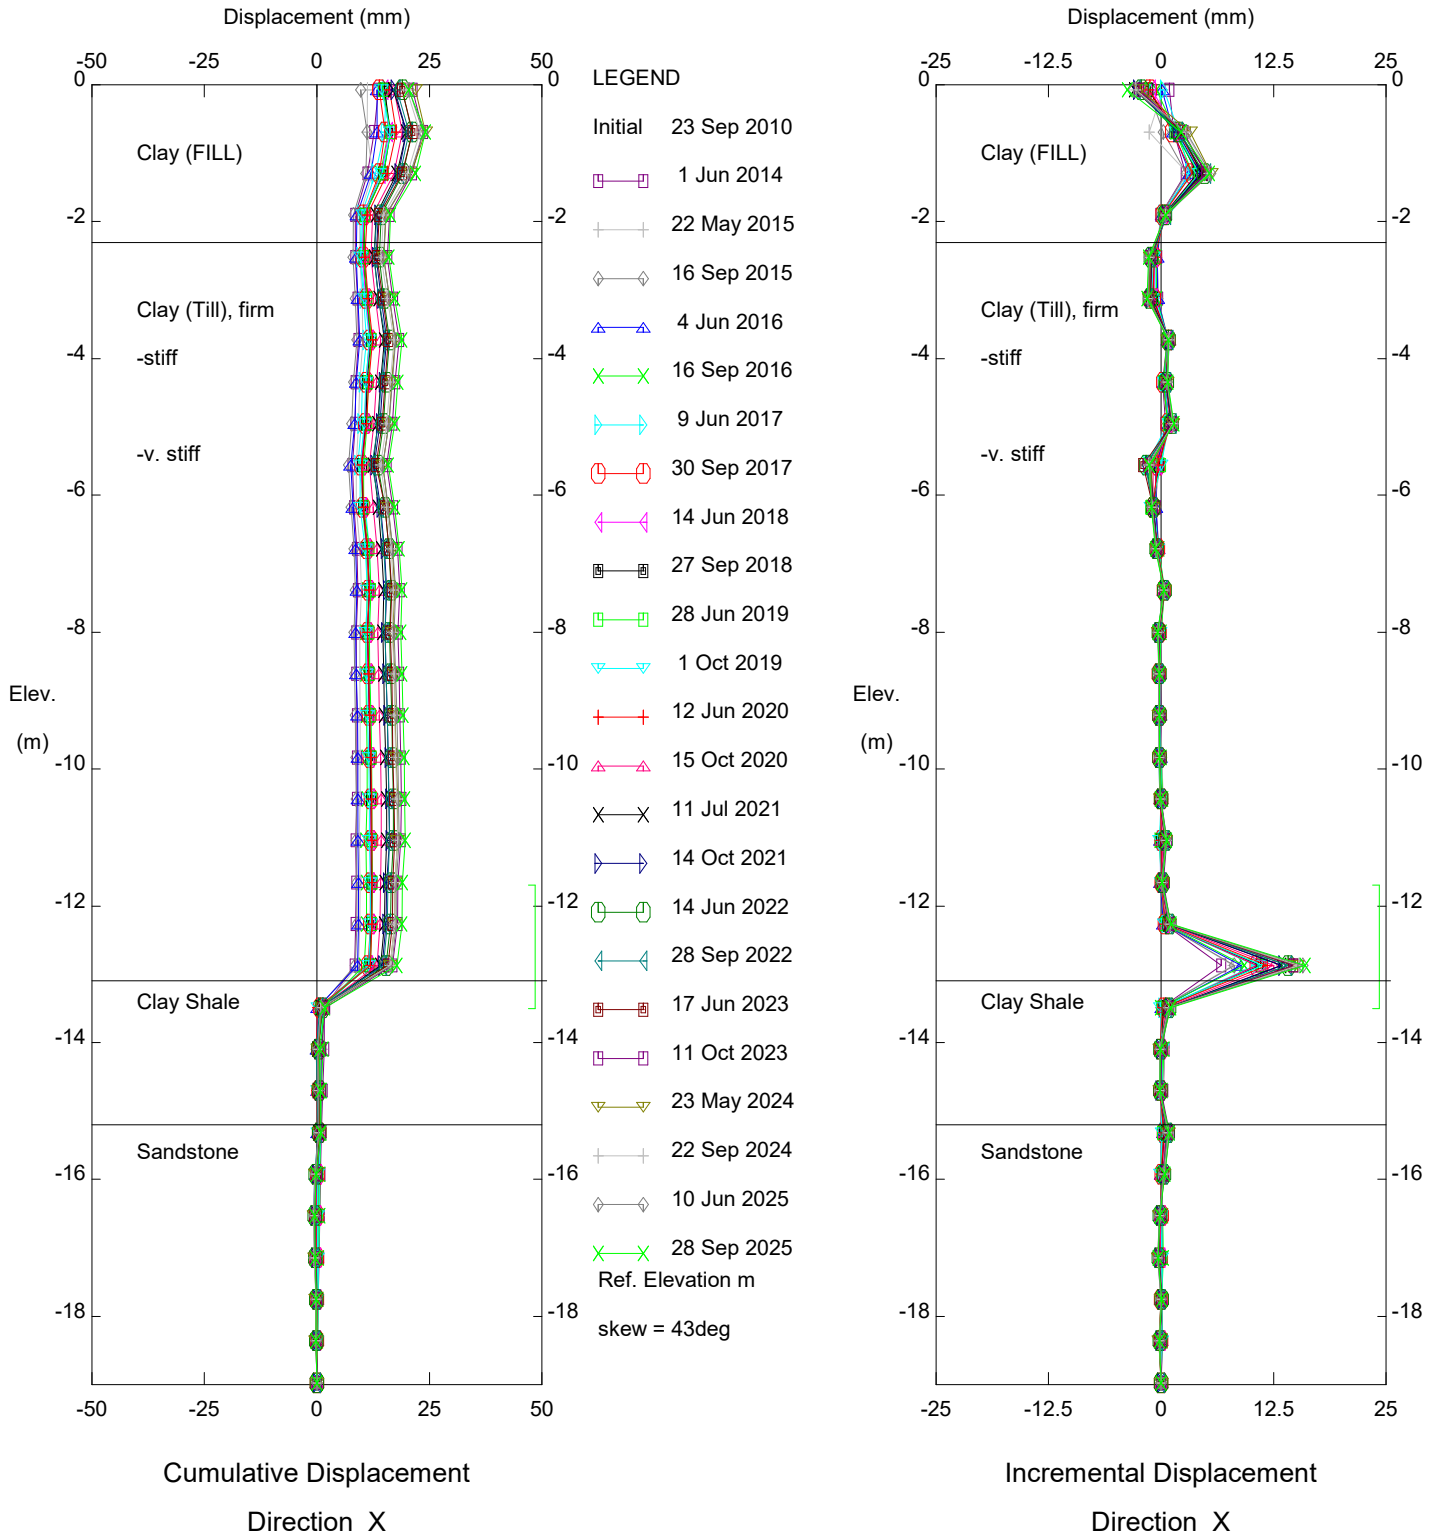

PH033-1 Judah Hill CNR Slide, Inclinometer SI10-16

Alberta Transportation


Thurber Engineering - Edmonton

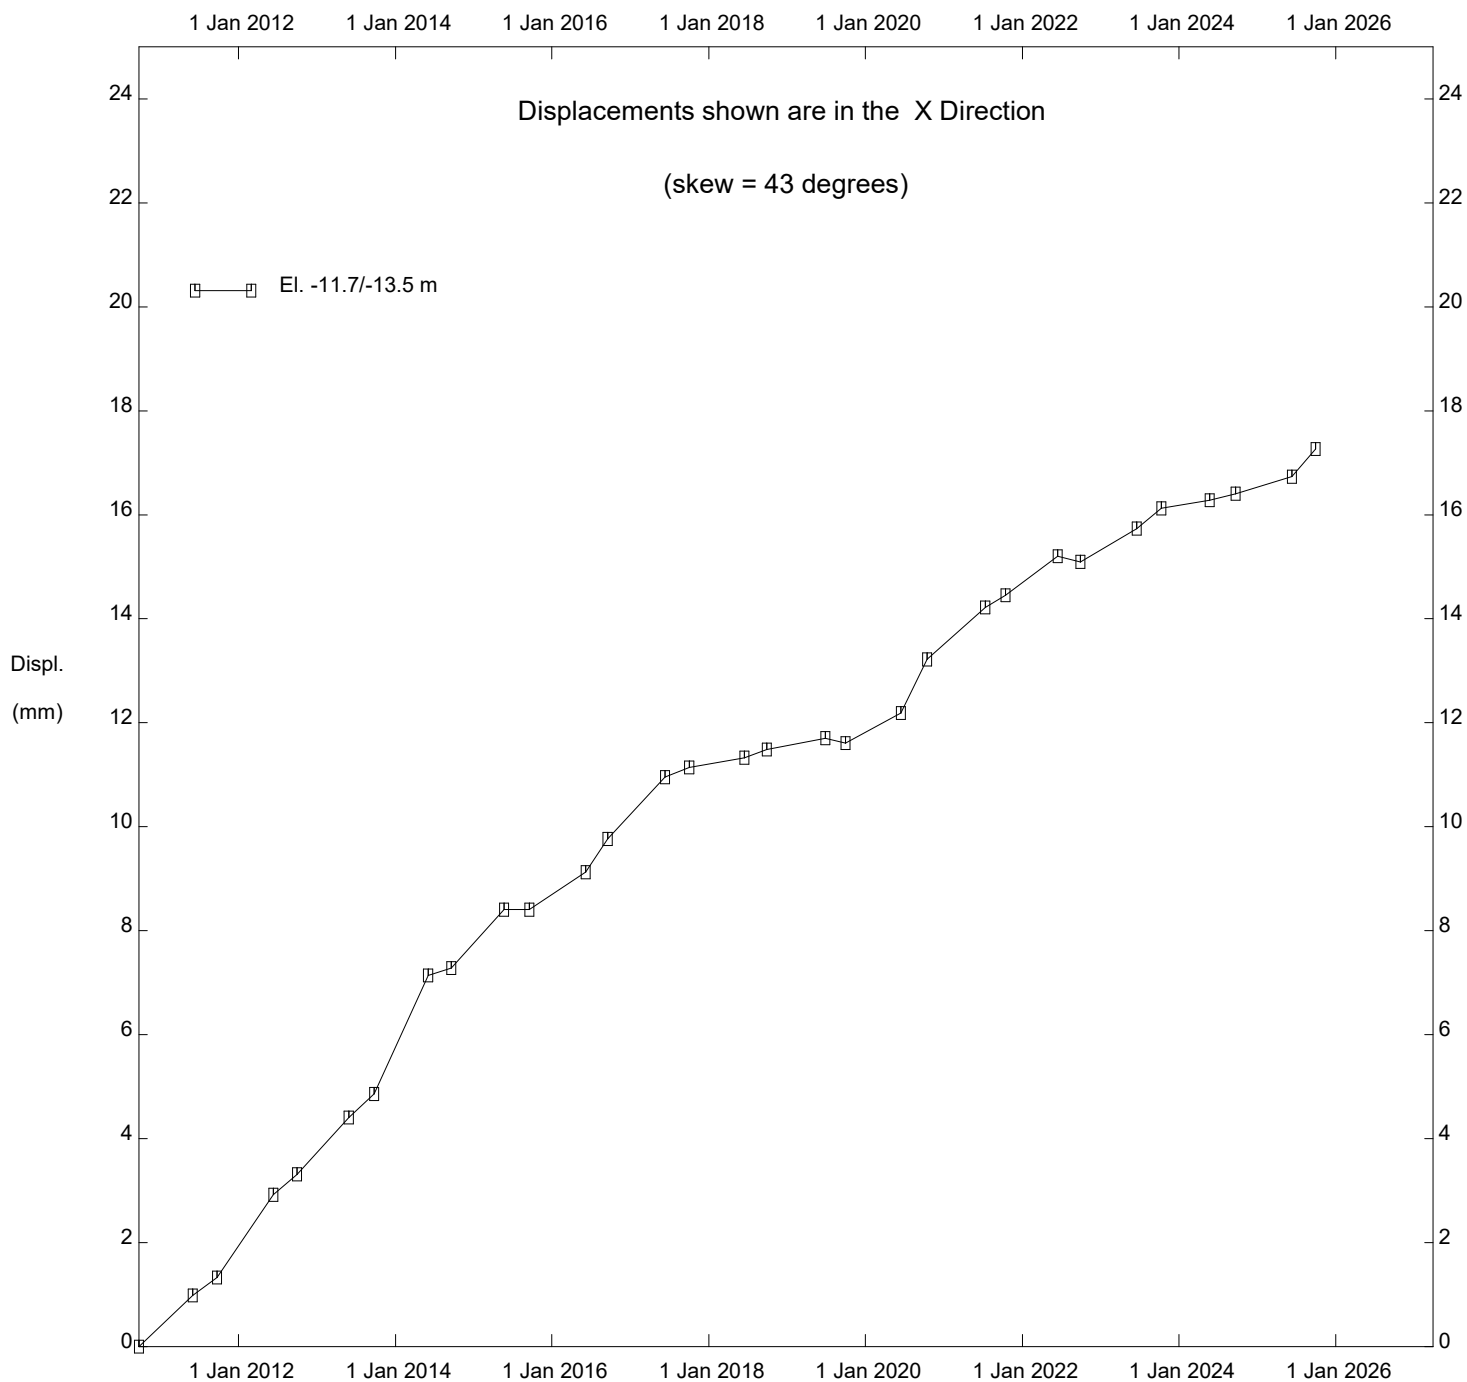

PH033-1 Judah Hill CNR Slide, Inclinator SI10-16

Alberta Transportation

Thurber Engineering - Edmonton

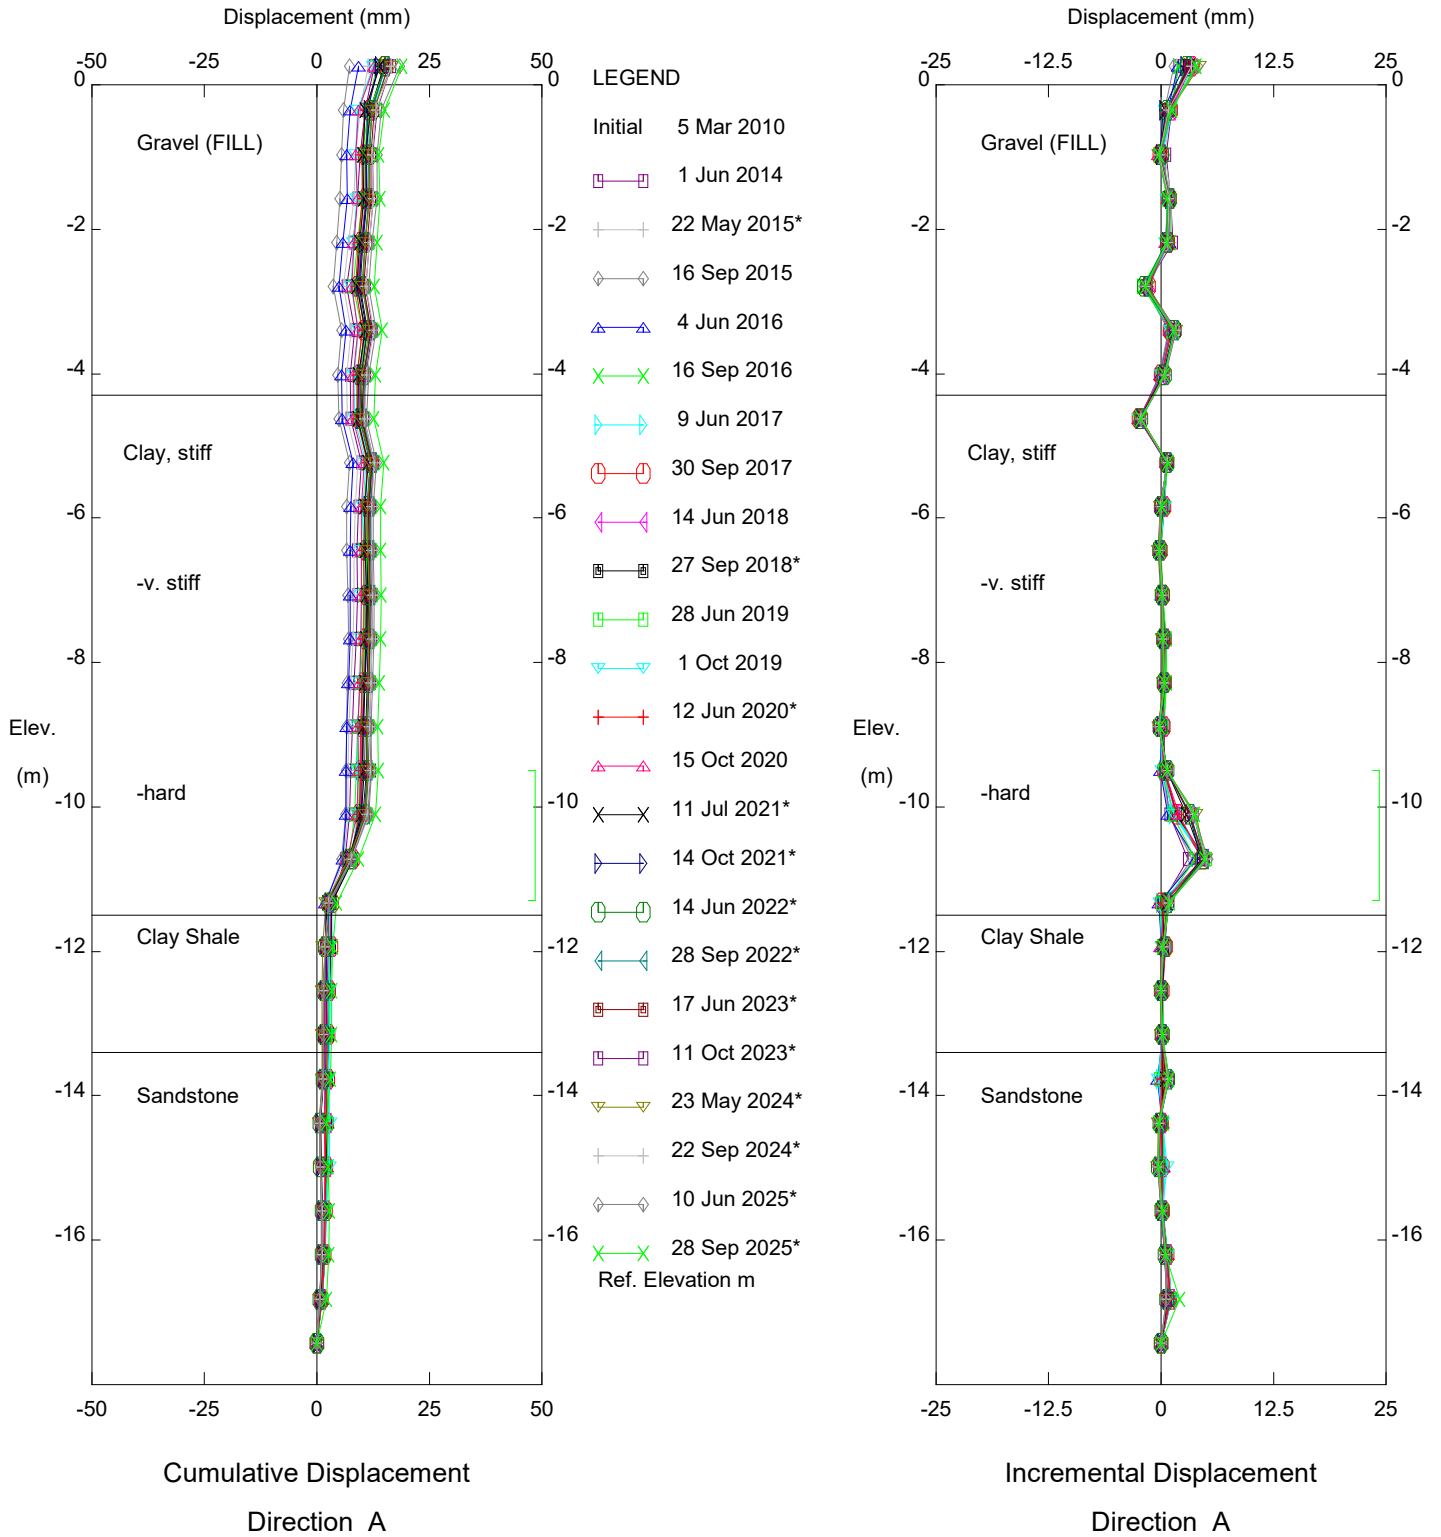


PH033-1 Judah Hill CNR Slide, Inclinometer SI10-17

Alberta Transportation

Sets marked \* include zero shift and/or rotation corrections.

# Thurber Engineering - Edmonton

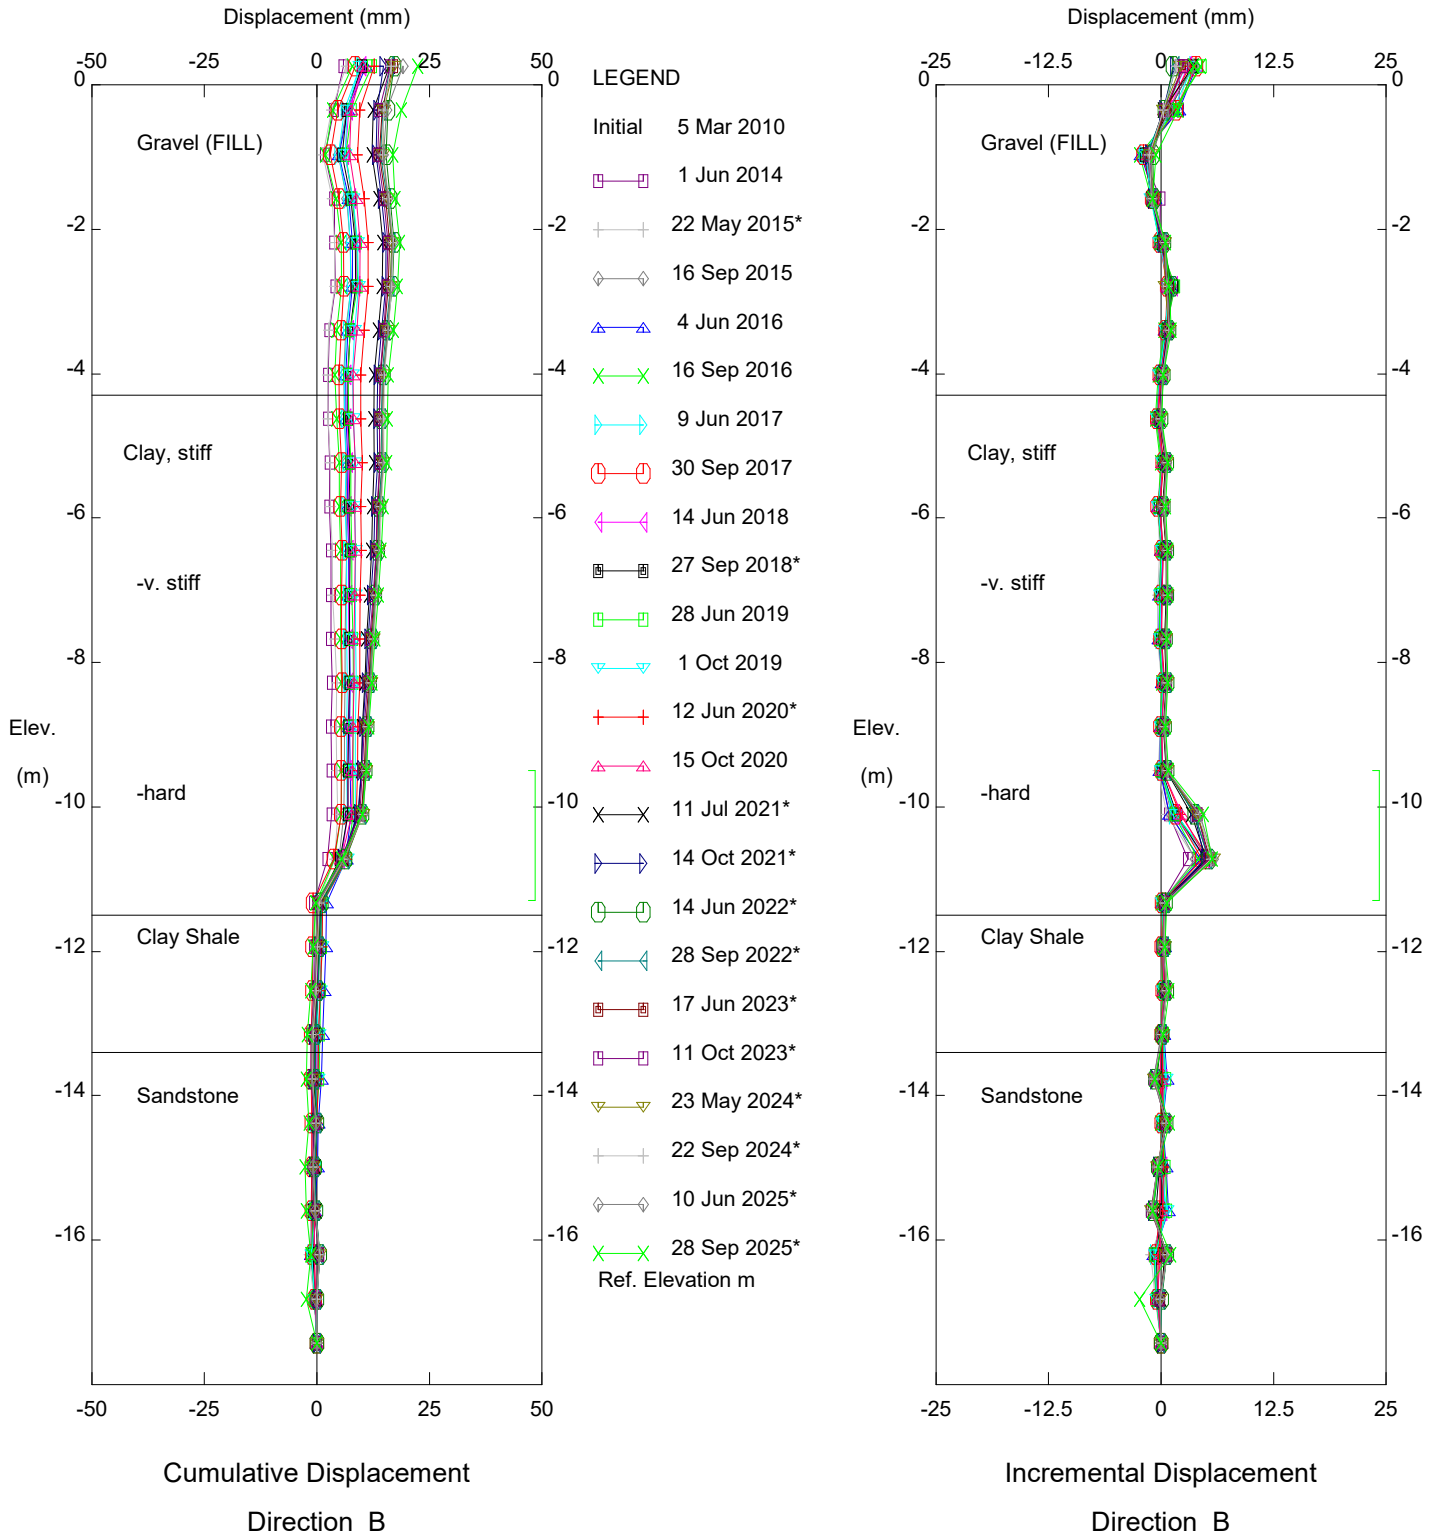


PH033-1 Judah Hill CNR Slide, Inclinometer SI10-17

Alberta Transportation

Sets marked \* include zero shift and/or rotation corrections.

Thurber Engineering - Edmonton

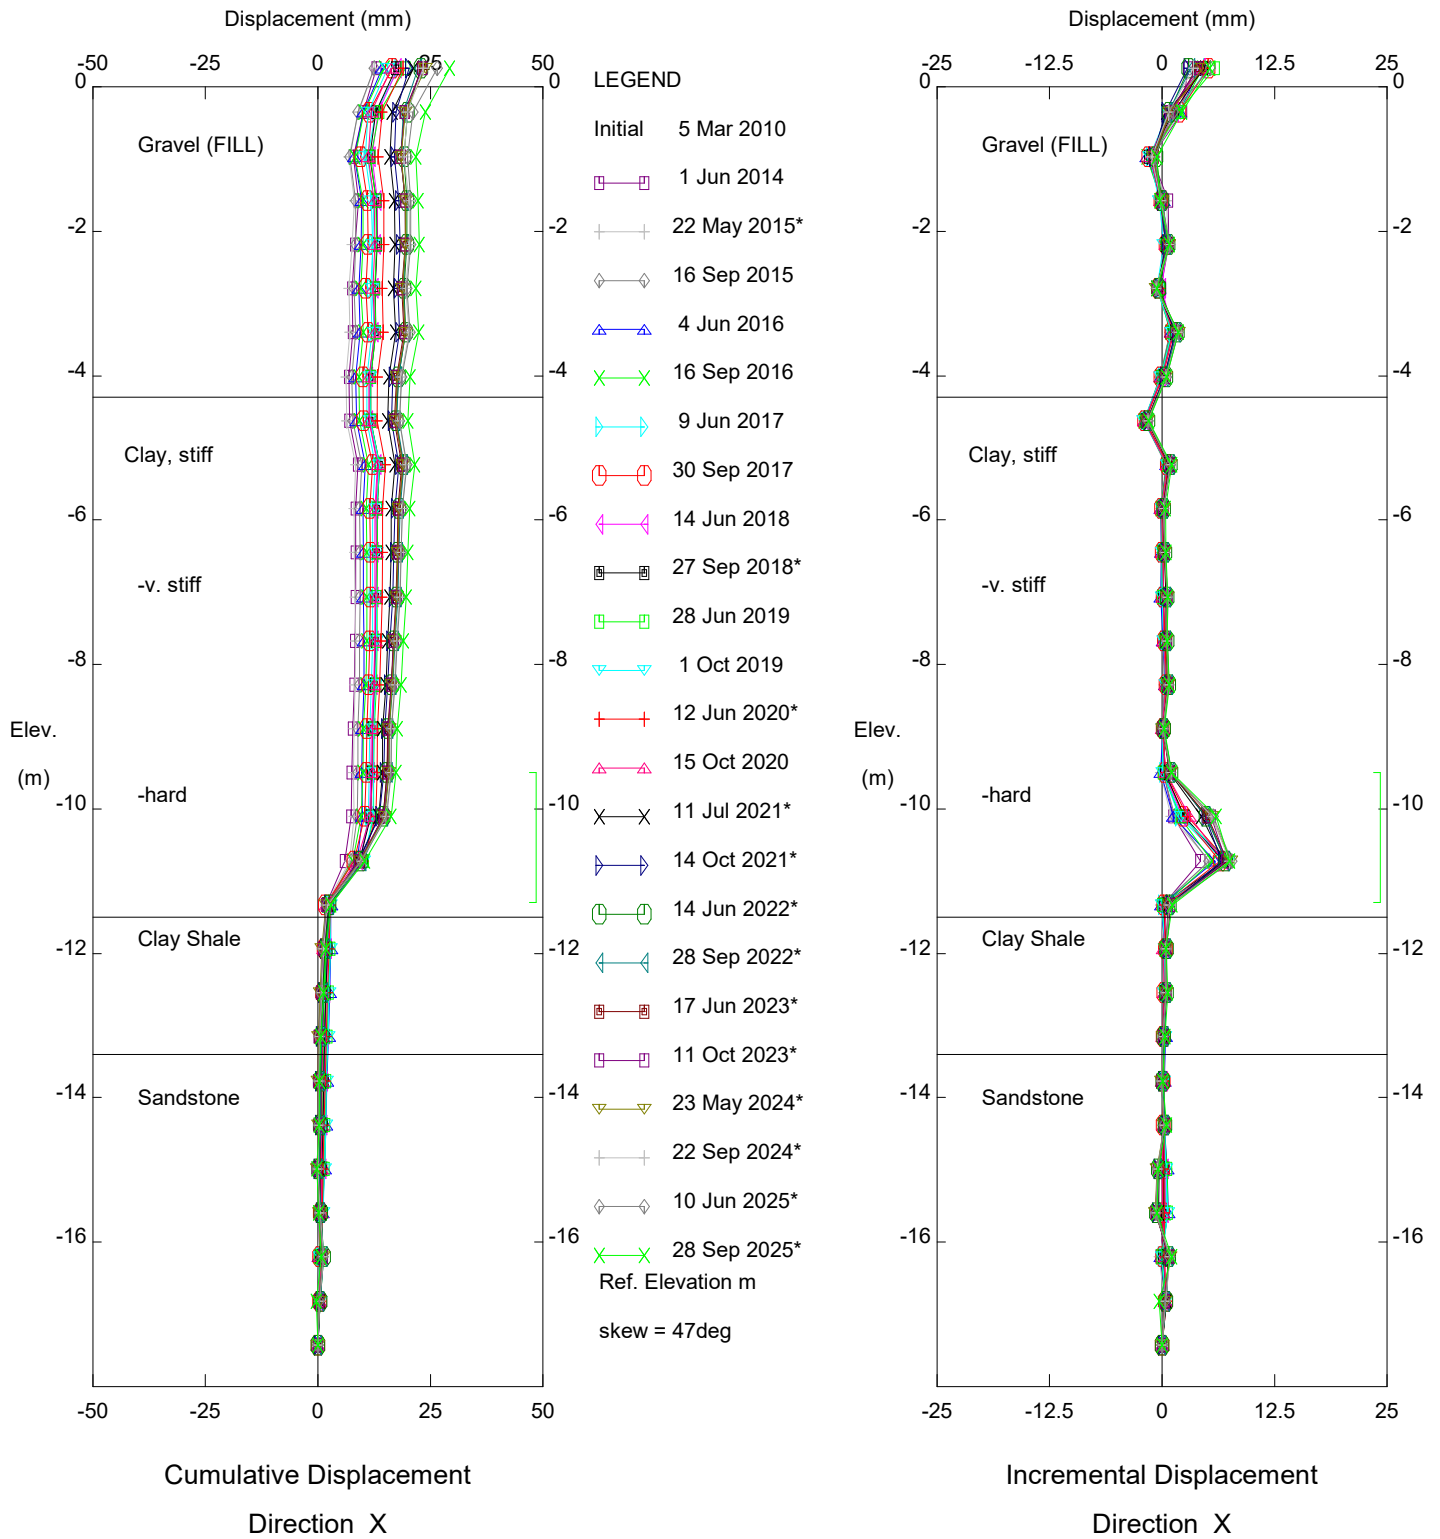

PH033-1 Judah Hill CNR Slide, Inclinometer SI10-17

Alberta Transportation

Sets marked \* include zero shift and/or rotation corrections.


Thurber Engineering - Edmonton

1 Jan 2012

1 Jan 2016

1 Jan 2020

1 Jan 2024

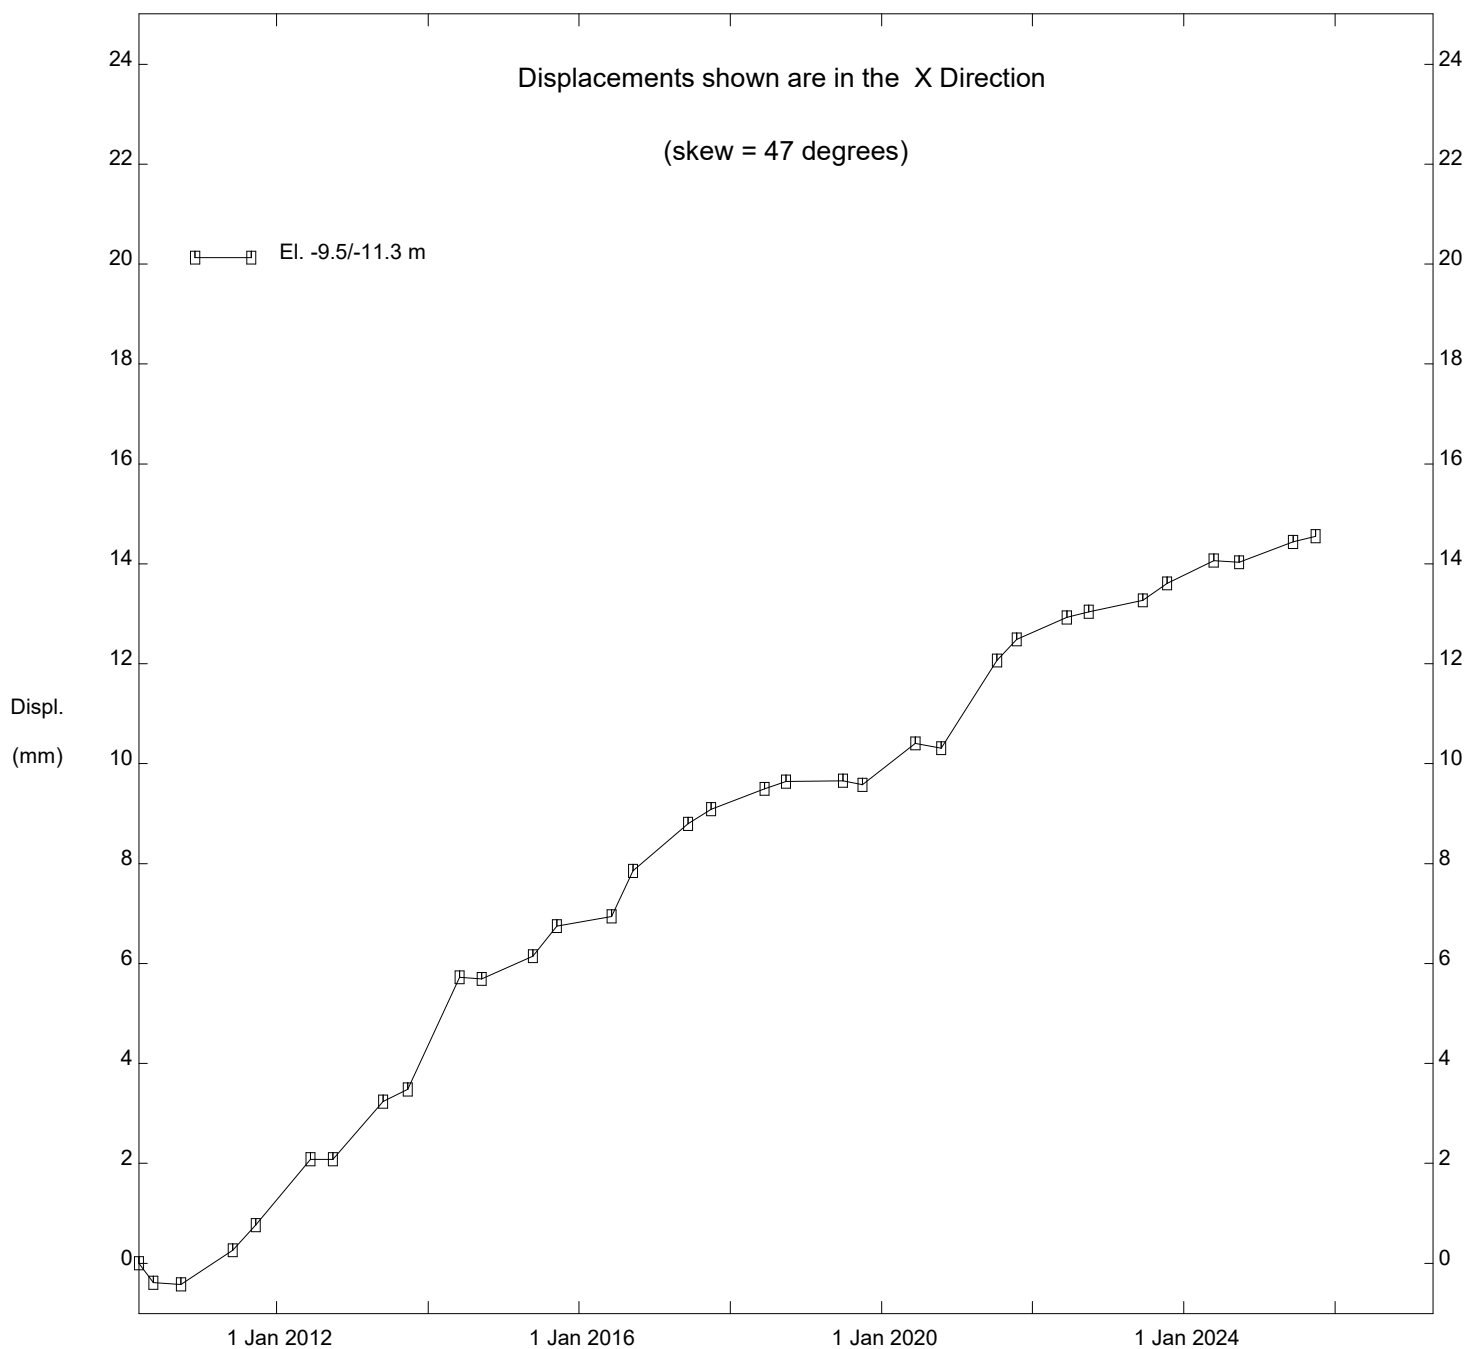

PH033-1 Judah Hill CNR Slide, Inclinometer SI10-17

Alberta Transportation



**FIGURE PH033-1**  
**PIEZOMETER DATA FOR HWY 744:04: JUDAH HILL CNR SLIDE**

