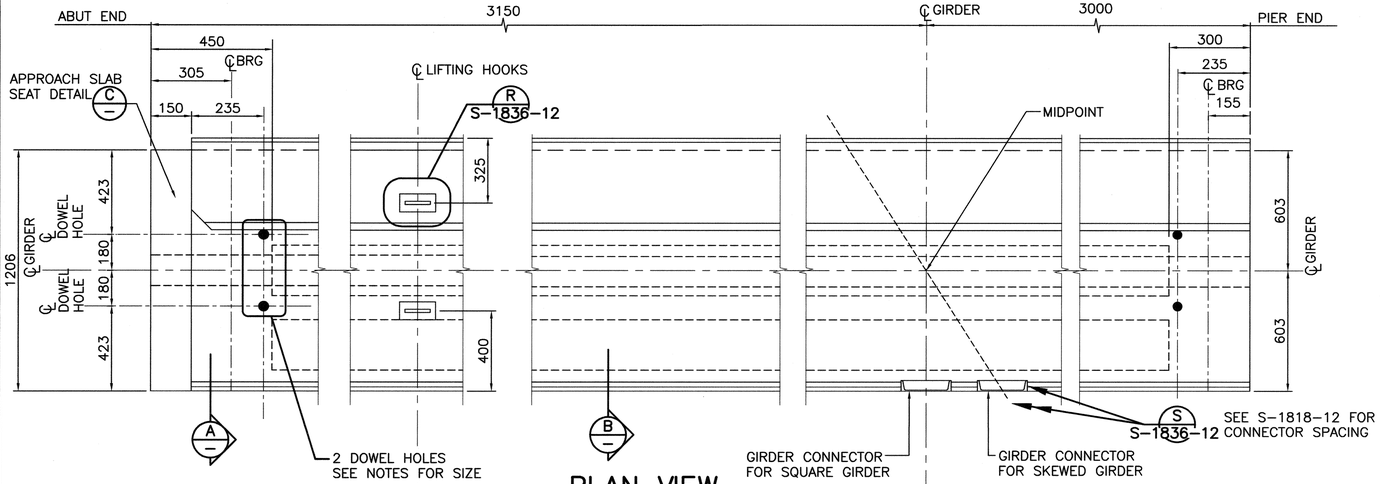

PLAN VIEW
NTS

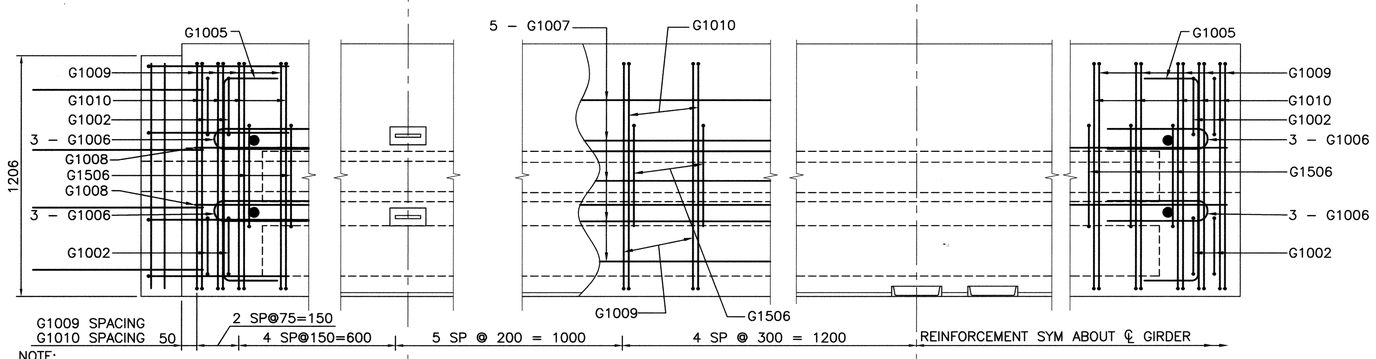

NOTE:
ADJUST REINFORCEMENT WHERE NECESSARY TO ACCOMMODATE CHANNEL CONNECTORS. AVERAGE STIRRUP SPACING TO BE MAINTAINED

REINFORCEMENT PLAN
NTS

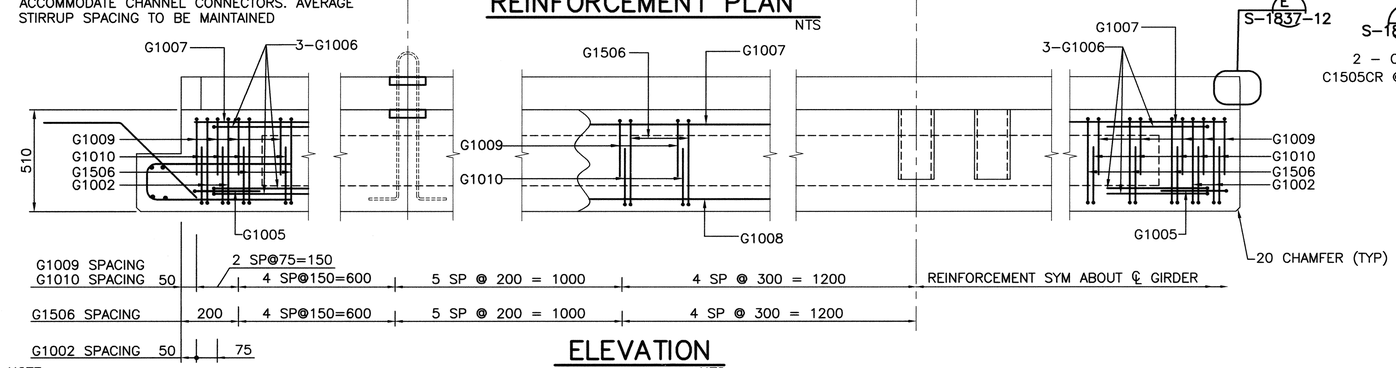

ELEVATION
NTS

NOTE:
SEE C FOR APPROACH SLAB SEAT REINFORCEMENT AND DIMENSIONS

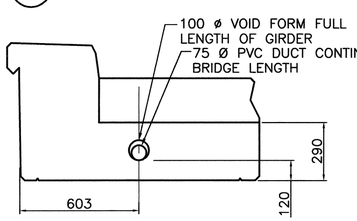

D SECTION
1:15

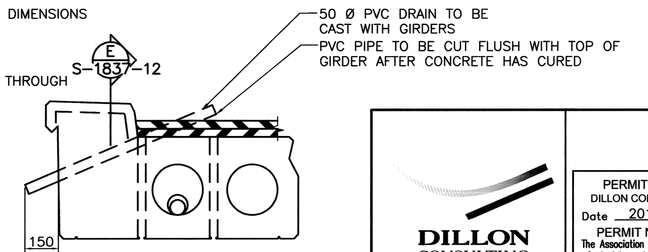

PIER END PVC DRAIN
1:15

BAR LIST: FOR SQUARE GIRDER

MARK	SIZE	No.	TYPE	X	Y	LENGTH	MASS
G1002	10	8	B	280		1350	8
G1005	10	2	A	1000	300	1550	3
G1006	10	12	D			1140	11
G1007	10	5	STR			5900	23
G1008	10	2	STR			5900	9
G1009	10	31**	H	1065	360	1740	43
G1010	10	31	G	1095	360	1770	43
G1501SS	15	4*	J	500	560	1060	7
G1502SS	15	4*	A	200	700	1515	10
G1503SS	15	2*	STR			1100	4
G1504SS	15	4*	STR			400	3
C1505CR	15	21	K	250		1250	41
G1506	15	27	B	410		1530	65
C2001CR	20	2	STR			5900	28

* AND ** SEE GENERAL NOTES

TOTAL BLACK kg: 205
TOTAL SS kg: 24
TOTAL CR kg: 69

BAR TYPES
(ALL BAR DIMENSIONS ARE OUT TO OUT UNO)

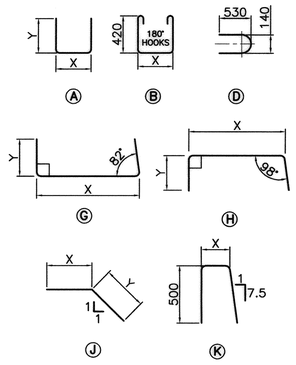

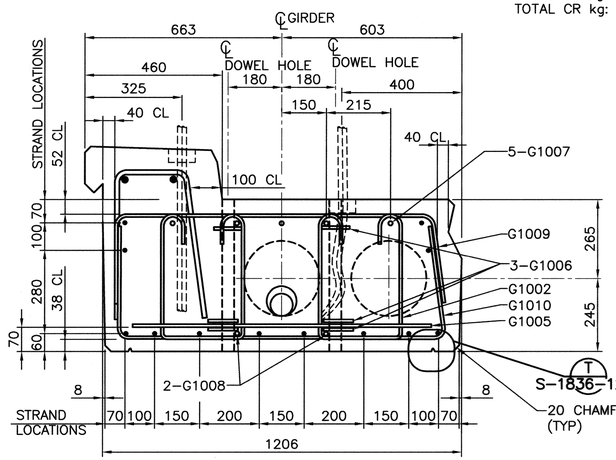

A SECTION
1:10

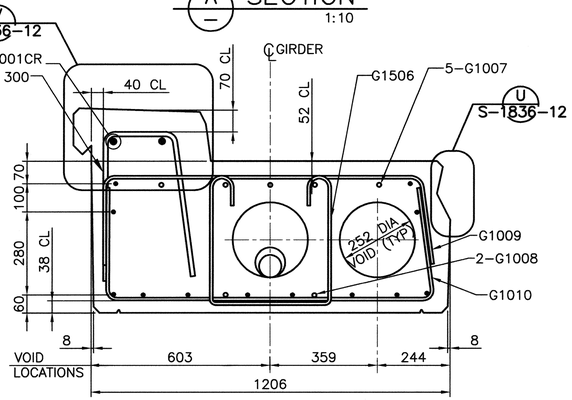

B SECTION
BRIDGERAIL AND ANCHORS NOT SHOWN FOR CLARITY
1:10

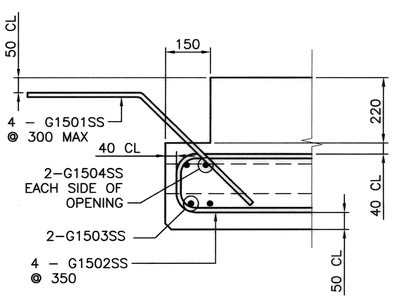

C APPROACH SLAB SEAT
1:10

GENERAL NOTES

- FOR ADDITIONAL NOTES, REFER TO S–1836–12
- 12 – 15ø, 7 WIRE STRANDS REQUIRED PER GIRDER: 8 BOTTOM, 4 TOP
- FORCE IN PRESTRESSING STEEL:
  INITIAL TENSION BEFORE RELEASE = 193 kN/STRAND
  DESIGN FORCE AFTER LOSSES = 164 kN/STRAND
- NO TENSION IN BOTTOM FIBRE AT MIDSPAN
- CALCULATED MASS OF ONE INTERIOR GIRDER = 8.91 TONNES
- CURB SHALL BE CAST MONOLITHIC WITH THE GIRDER AS SHOWN
- BAR LIST ABOVE ASSUMES A GIRDER WITH ONE PIER END AND ONE ABUTMENT END. FOR A GIRDER WITH TWO PIER ENDS, BARS NOTED BY A * MAY BE ELIMINATED. FOR GIRDERS WITH TWO ABUTMENT ENDS, BARS NOTED BY * SHALL BE DOUBLED IN QUANTITY
- ** BAR QUANTITY PROVIDED DOES NOT INCLUDE ADDITIONAL BARS REQUIRED AT EACH BRIDGERAIL POST LOCATION. QUANTITY OF G1009 BARS TO BE INCREASED TO ACCOUNT FOR 2 ADDITIONAL BARS AT EACH BRIDGERAIL POST LOCATION, ONE EACH SIDE
- DOWEL HOLES SHALL BE 40 ø FOR SPILL THROUGH TYPE ABUTMENTS AND 45 ø FOR BACK WALL TYPE ABUTMENTS

• WORK THESE DRAWINGS TOGETHER: S–1816–12, S–1817–12, S–1818–12, S–1819–12, S–1836–12, S–1837–12

DILLON CONSULTING

PERMIT TO PRACTICE
DILLON CONSULTING LIMITED
Date 2012–01–04
PERMIT NUMBER: P2528
The Association of Professional Engineers, Geologists and Geophysicists of Alberta

DESIGNER
PROFESSIONAL ENGINEER ALBERTA KEVIN G. WILLIAMS
DATE 2012–01–04

CHECKER
PROFESSIONAL ENGINEER ALBERTA JAMES A. SKEAD
DATE 2012–01–04

REV	DATE	REVISIONS	BY
6			
5			
4			
3			
2			
1			

RECOMMENDED
DIRECTOR BRIDGE ENGINEERING
D.W. Williamson

APPROVED
EXECUTIVE DIRECTOR
TECHNICAL STANDARDS BRANCH
DATE MAR. 5/12

Government of Alberta ■ Transportation

PRESTRESSED CONCRETE 6 m SLW–510 EXTERIOR GIRDER

AI BAR CODE	DATE	SHEET	DRAWING
	2012–01–04	2 OF 6	S–1817–12

2011-12-13

G:\CAD\115525\DESIGN\115525 S02-P.DWG